


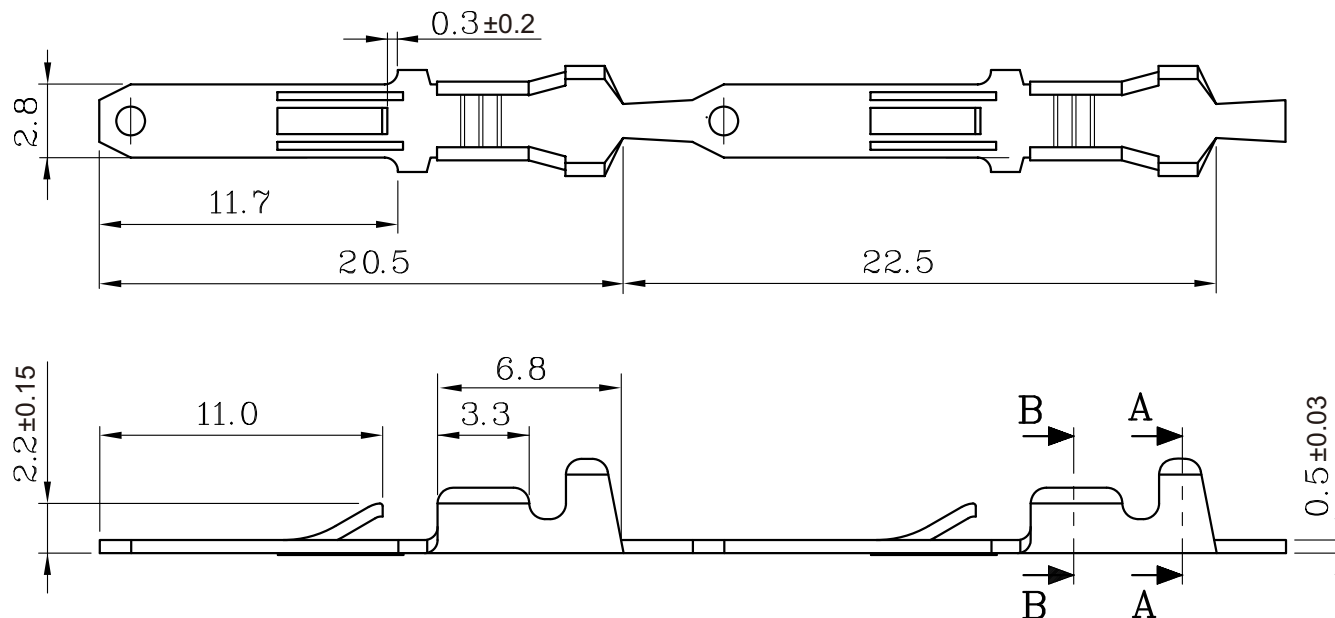

NOTE:



1. 表面處理
鍍錫 60u 以上

1.SURFACE TREATMENT:
TIN PLATING
THICKNESS MORE THAN 60u

適用電線 18~16
WIRE RANGE

料 厚 0.5
THICKNESS

包裝數量 10000
PACKING Q'TY PCS/R



MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$


.X $\pm$ 0.20

.XX $\pm$ 0.10

.XXX $\pm$

ANG $\pm$

PPOJECTION



ORDER INFORMATION

Q110-MT5LK-16-LF

SERIES 16 WAY LEADFREE
LOCK
0.5mm TAB
TIN/PLATE
MALE TERMINAL

DESCRIPTION: 110 公勾, 直式高腳