



說明:
 1.預鍍錫膜厚40u"以上
 2.擇鍍金Zone"A"測厚區3u"以上
 3.對手件:118型 TAB=0.6
 插入力:1.0kg以下
 拉拔力:0.4~1.2kg

NOTE:
 1.Pre-Tin Plated Thickness More Than 40u"
 2.Selective Gold Plating 3u" Over Zone"A"
 3.Mating Part: 118-Type Tab=0.6
 Inserted Force:Less Than 1.0kg
 Tensile Force:0.4~1.2kg

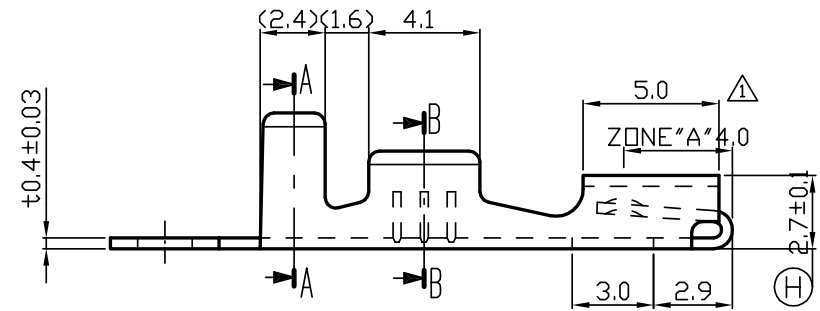

1	Q118TM-FT-16	Brass	Note 1	0.85~1.25mm ²
NO.	產品編號 Part Number	材料 Material	表面處理 Surface Treatment	線徑 Wire Range

RoHS Compliant

TOLERANCES ARE



ORDER INFORMATION

Q11850-FT-16-LF
 SERIES LEADFREE
 16 AWG
 TERMINAL
 FEMALE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
煜倫股份有限公司
 www.morethanall.com

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE
 SIZE A4 PPROJECTION

<1.0 : ± 0.10
 1.0-5.0 : ± 0.15
 5.0-10.0 : ± 0.20
 10.0-20.0 : ± 0.25
 20.0-45.0 : ± 0.30
 >45.0 : ± 0.50
 ANGLE : ± 2.0°

DESCRIPTION: 118 TYPE FEMALE TERMINAL