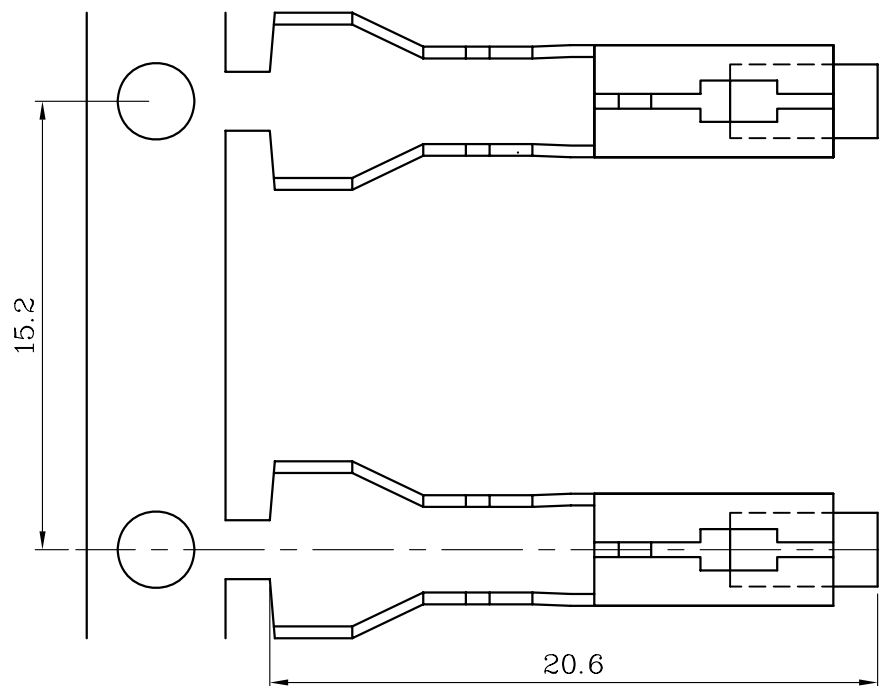


NOTE:

1. 表面處理

預鍍錫 40u" 以上

1.SURFACE TREATMENT:

PRE-TIN

THICKNESS MORE THAN 40u"

包裝數量 3500

PACKING Q'TY PCS/R

對手件 TAB: 0.6t

MATING PART

料厚 0.4

THICKNESS

插入力 0.4~1.0kg

INSERTED FORCE

拉拔力 0.4~1.0kg

TEASILE FORCE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.30

.XX ± 0.10

.XXX ± 0.05

ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

Q118D-FT6-16-LF

SERIES

LEADFREE

16 AWG

THICKNESS 0.6mm

TERMINAL

FEMALE

DESCRIPTION: 118 型, 母勾