
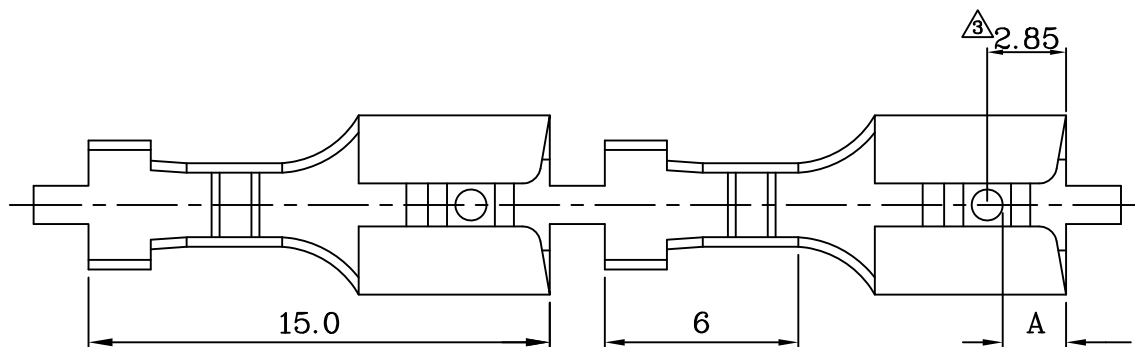




適用電線 22~18
WIRE RANGE
包裝數量 10000
PACKING Q'TY PCS/R

NOTE:
1. 表面處理
鍍錫 40u" 以上

1.SURFACE TREATMENT:
TIN PLATING
THICKNESS MORE THAN 40u"



2.46	TAB: 0.8t	Q187-FT8-18	鍍錫 TIN PLATING
2.35	TAB: 0.5t	Q187-FT5-18	鍍錫 TIN PLATING
DIM H	MATING PART	PART NO.	FINISH

	0.8~1.3kg	1.5~2.5kg	2.5~8kg
處理 FINISH	A 點插入力 A INSERTED FORCE	插入力 INSERTED FORCE	拉拔力 TEASILE FORCE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

Q187-FTx-18-LF
SERIES T LEADFREE
18~22 AWG
5:THICKNESS 0.5mm
8:THICKNESS 0.8mm
TERMINAL
FEMALE

DESCRIPTION: 187母, 中腳