


NOTE:
 1. 表面處理
 預鍍錫 40u"以上




1.SURFACE TREATMENT:
 PRE-TIN
 THICKNESS MORE THAN 40u"

料厚 0.3
 THICKNESS
 適用電線 24~20
 WIRE RANGE
 包裝數量 3500
 PACKING Q'TY pcs/R
 0.8~1.3kg 8kg以上

插入力 拉拔力
 INSERTED FORCE TEASILE FORCE



2.57	TAB: 0.8t	Q187-FT8LS-20	預鍍錫 PRE-TIN
2.42	TAB: 0.5t	Q187-FT5LS-20	預鍍錫 PRE-TIN
DIM H	MATING PART	PART NO.	FINISH

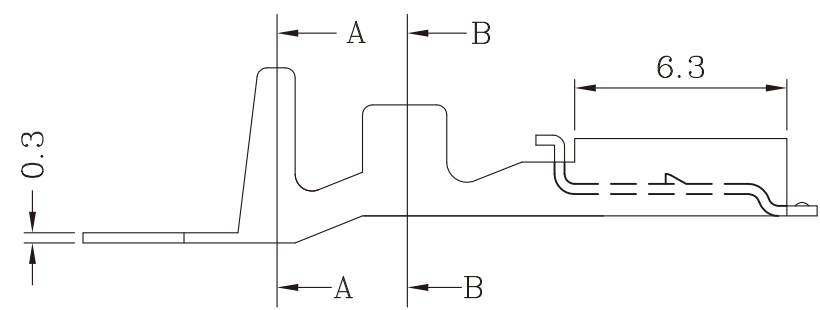

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司
 www.morethanall.com

DRAWING BY CY		X. ± .X ± .XX ± .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1:1	
DATE		
SIZE A4	PJECTION	



ORDER INFORMATION

Q187-FTxLS-20-LF
 SERIES
 LEADFREE
 20-24 AWG
 SPRING
 LOCKING
 FEMALE TERMINAL
 5: THICKNESS 0.5mm
 8: THICKNESS 0.8mm

DESCRIPTION: 187 壓式低腳