


MATERIAL
INSULATION: NYLON
MATERIAL: BRASS
TIN PLATING

- NOTE:
- 1. MAXIMUM ELECTRICAL RATING: 105°C 300 VOLTS
 - 2. WIRE RANGE: 22-16 AWG / 0.5-1.5 mm²
INSULATED COLOR: RED
 - 3. WIRE RANGE: 16-14 AWG / 1.5-2.5 mm²
INSULATED COLOR: BLUE
 - 4. MATERIAL THICKNESS: t
TOLERANCE: ±0.05

MAXIMUM ELECTRIC CURRENT

A. W. G	22	20	18	16	14	12	10
MAX AMP	3	4	7	10	15	20	24

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	NEMA TAB	B ±0.20	F ±0.30	L ±1.50	E ±0.60	D ±0.50	d1 ±0.20	t
22-16 AWG 0.5-1.5 mm ²	A	Q187-FT5N-16	0.5x4.8	5.0	6.5	20.0	11.0	4.1	1.7
	A	Q187-FT8N-16	0.8x4.8	5.0	6.5	20.0			
16-14 AWG 1.5-2.5 mm ²	A	Q187-FT5N-14	0.5x4.8	5.0	6.5	20.0	11.0	4.8	2.3
	A	Q187-FT8N-14	0.8x4.8	5.0	6.5	20.0			

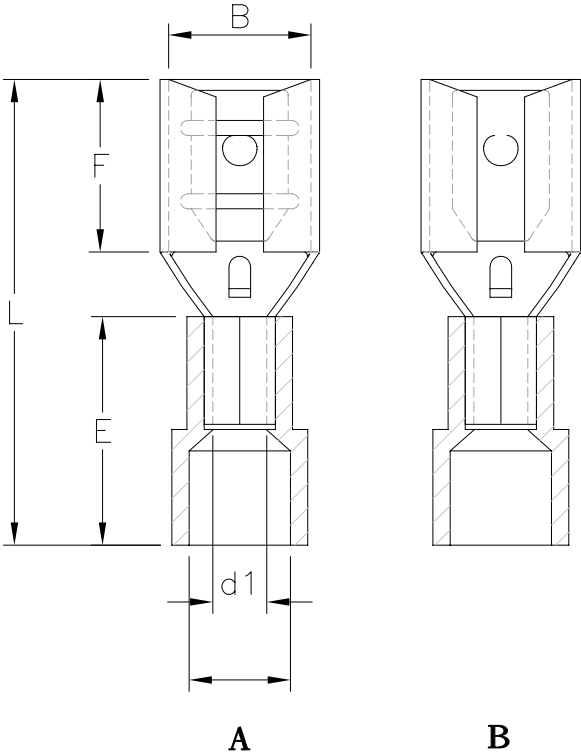

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

Q187-FTxN-xx-LF

SERIES

FEMALE

TERMINAL

LEADFREE

16:16~22 AWG

14:14~16 AWG

NYLON

5:THICKNESS 0.5mm

8:THICKNESS 0.8mm

DESCRIPTION: