

MAXIMUM ELECTRIC CURRENT

A. W. G	22	20	18	16	14
MAX AMP	3	4	7	10	15

NOTE:


1. MAXIMUM ELECTRICAL RATING: 105°C 300 VOLTS
2. WIRE RANGE: 22-16 AWG / 0.5-1.5 mm²
INSULATED COLOR: RED
3. WIRE RANGE: 16-14 AWG / 1.5-2.5 mm²
INSULATED COLOR: BLUE
4. MATERIAL THICKNESS: t
TOLERANC: ±0.05

MATERIAL

INSULATION: NYLON

MATERIAL: BRASS

TIN PLATING

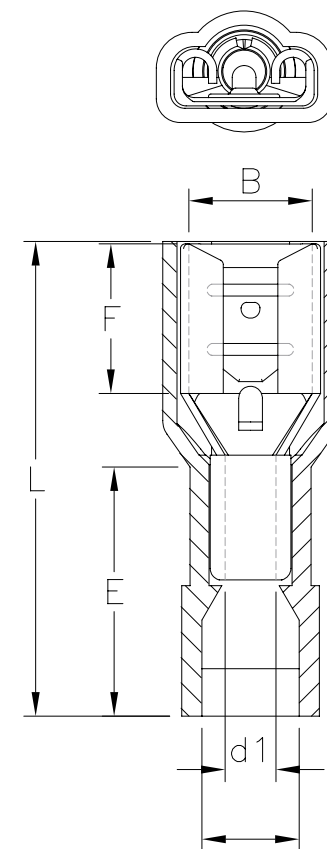

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	NEMA TAB	B ±0.20	F ±0.30	L ±1.00	E ±0.60	D ±0.50	d1 ±0.20	t
22-16 AWG 0.5-1.5 mm ²	Q187-FT5NFA-16	0.5x4.8	5.0	6.5	20.0	10.5	4.2	1.7	0.35
	Q187-FT8NFA-16	0.8x4.8	5.0	6.5	20.0	10.5	4.2	1.7	0.35
16-14 AWG 1.5-2.5 mm ²	Q187-FT5NFA-14	0.5x4.8	5.0	6.5	20.0	10.5	4.9	2.3	0.35
	Q187-FT8NFA-14	0.8x4.8	5.0	6.5	20.0	10.5	4.9	2.3	0.35

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

Q187-FTxNFA-xx-LF

SERIES T T T T T T T LEADFREE
FEMALE 14:14~16AWG
TERMINAL 16:16~22AWG
5:0.5mm TAB FULL
8:0.8mm TAB NYLON

DESCRIPTION: