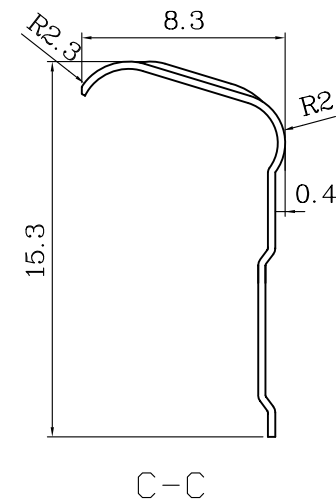
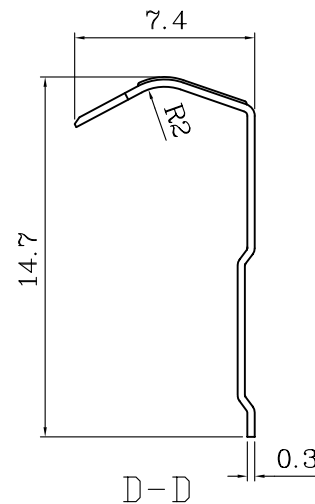
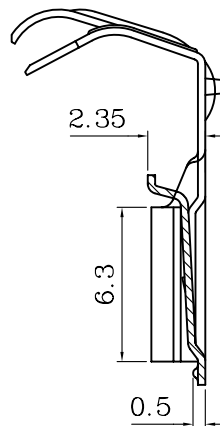
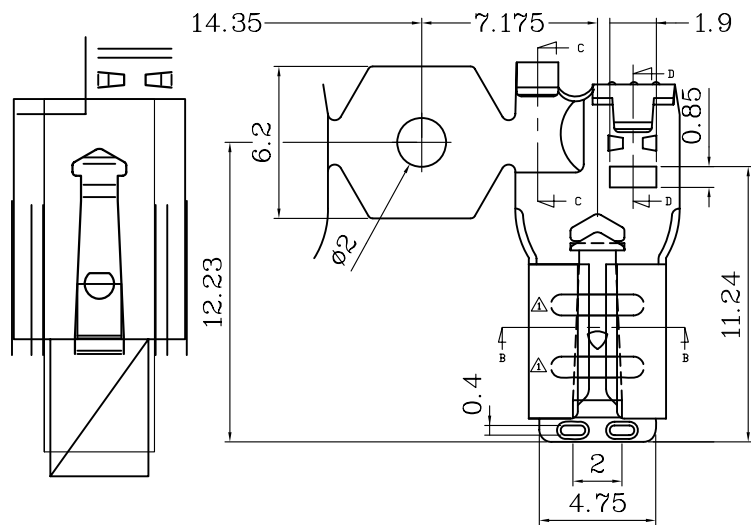


B-B

NOTE:

1. 表面處理
預鍍錫 40u" 以上

1.SURFACE TREATMENT:
PRE-TIN
THICKNESS MORE THAN 40u"

拉拔力 EASILE FORCE	3.0kg	材質 MATERIAL	JIS2600EH	
插入力 INSERTED FORCE	2.5kg以下	料厚 THICKNESS	0.3	包裝數量 PACKING Q'TY
點插入力 INSERTED FORCE	1.5kg以下	間距 PITCH	14.35	適用電線 WIRE RANGE
				4000 PCS/R 22~16

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

Q187-GT5LS-16-LF

SERIES LEADFREE
16~22AWG
SPRING
LOCKING
FLAG 0.5t
TERMINAL

DESCRIPTION: