

NOTE:

1. 表面處理

鍍錫 40u" 以上

1. SURFACE TREATMENT:

TIN PLATING

THICKNESS MORE THAN 40u"

2. Current rating: 5A AC,DC

3. Voltage rating: 250V AC,DC

0.8	Q187-MR8-14	鍍錫 TIN PLATING
0.5	Q187-MR5-14	鍍錫 TIN PLATING
DIM t	PART NO.	FINISH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1

DATE


SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

P PROJECTION



ORDER INFORMATION

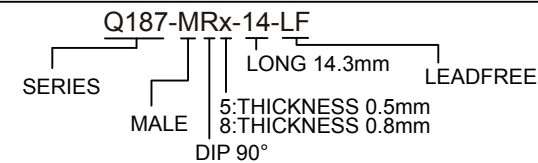

DESCRIPTION: 187公基旗型