
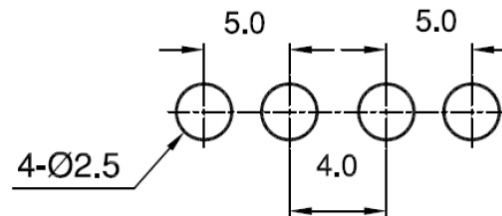
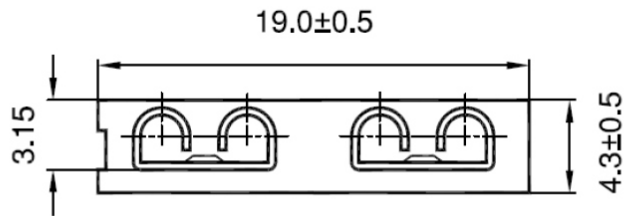
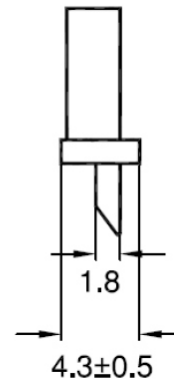


SPECIFICATIONS :

- A. Metal Material: Spring Brass
 - B. Insertion & Extraction Force : 1 Kg. Min.
 - C. Dielectrie Strength For 60 Seconds : AC 2000 V Min.
 - D. Suitable Rated Current : 15A 250V
 - E. Insulation Resistance AT 500V DC : 100M Ω Min.
 - F. Temperature Rise : 50°C Max.
 - G Voltage Drop : 20 mV Max.
 - H. Body Material : Flame Retarding UL 94V0 Thermoplastic Material
- Metal Material : Phosphor Copper
Suitable Rated Current : 30A 250V

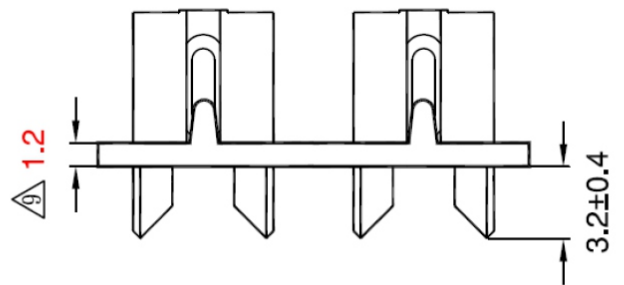

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

Q205-FD-1X02-LF
SERIES | LEADFREE
02 WAY
DIP 180°
FEMALE

DESCRIPTION: