

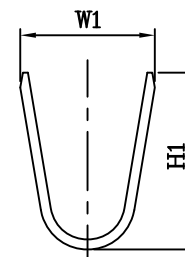


SEC. A-A

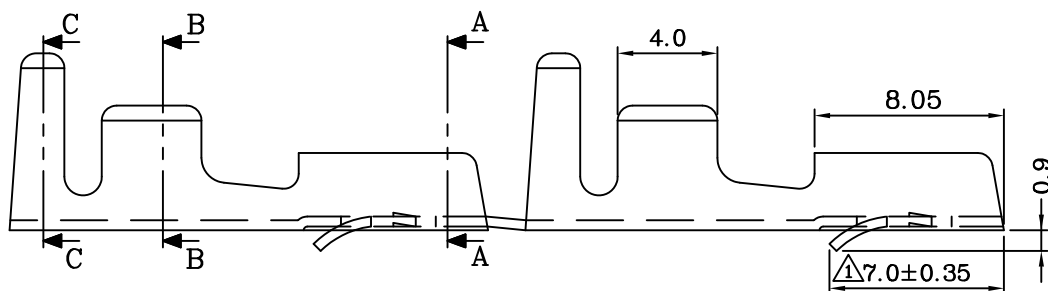

SEC. C-C



SEC. B-B

NOTE:

1. 表面處理

鍍錫 40u"以上

1. SURFACE TREATMENT:

TIN PLATING

THICKNESS MORE THAN 40u"

料厚

THICKNESS 0.4

間距 21.5

TAB: 0.8t

5000	20~14 高腳	3.6	3.4	5.3 △	5.2	Q250-FT8LK-14	鍍錫 TIN PLATING
PACKING Q'TY	WIRE RANGE	DIM H2	DIM W2	DIM H1	DIM W1	PART NO.	FINISH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

Q250-FT8LK-14-LF

SERIES
LEADFREE
14~20AWG
LOCK
0.8t
TERMINAL
FEMALE

DESCRIPTION: