


MATERIAL
INSULATION: NYLON
MATERIAL: BRASS
TIN PLATING

- NOTE:
- 1. MAXIMUM ELECTRICAL RATING: 105°C 300 VOLTS
 - 2. WIRE RANGE: 22-16 AWG / 0.5-1.5 mm²
INSULATED COLOR: RED
 - 3. WIRE RANGE: 16-14 AWG / 1.5-2.5 mm²
INSULATED COLOR: BLUE
 - 4. WIRE RANGE: 12-10 AWG / 4-6 mm²
INSULATED COLOR: YELLOW
 - 5. MATERIAL THICKNESS: t
TOLERANCE: ±0.05

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	NEMA TAB	B ±0.20	F ±0.30	L ±1.50	E ±0.60	D ±0.50	d1 ±0.20	t
22-16 AWG 0.5-1.5 mm ²						11.0	4.1	1.7	0.25
									0.25
									0.35
									0.35
	A Q250-FT8N-16	0.8x6.4	6.6	7.9	22.0				0.4
16-14 AWG 1.5-2.5 mm ²						11.0	4.8	2.3	0.4
									0.4
									0.25
									0.25
	A Q250-FT8N-14	0.8x6.4	6.6	7.9	22.0				0.35
12-10 AWG 4-6 mm ²	Q250-FT8N-10	0.8x6.4	6.6	7.9	24.0	13.0	6.5	3.4	0.35
									0.4
									0.5

MAXIMUM ELECTRIC CURRENT

A. W. G	22	20	18	16	14	12	10
MAX AMP	3	4	7	10	15	20	24

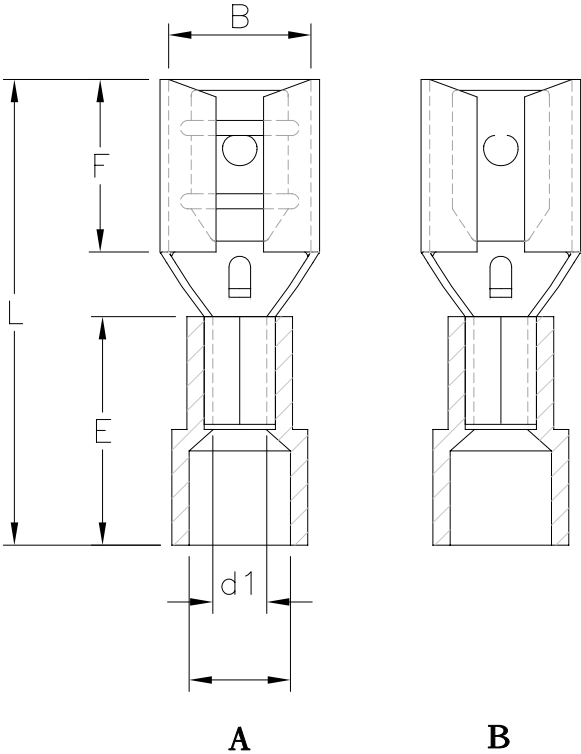

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

Q250-FT8N-xx-LF

SERIES

FEMALE
TERMINAL

LEADFREE
16:16~22 AWG
14:14~16 AWG
10:10~12 AWG
NYLON
THICKNESS 0.8mm

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: