

MATERIAL

INSULATION: VINYL

MATERIAL: BRASS


TIN PLATING

NOTE:

- 1. MAXIMUM ELECTRICAL RATING: 105°C 300 VOLTS
- 2. WIRE RANGE: 16-14 AWG / 1.5-2.5 mm²
INSULATED COLOR: BLUE
- 3. MATERIAL THICKNESS: t
TOLERANCE: ±0.05

MAXIMUM ELECTRIC CURRENT

A. W. G	22	20	18	16	14	12	10
MAX AMP	3	4	7	10	15	20	24

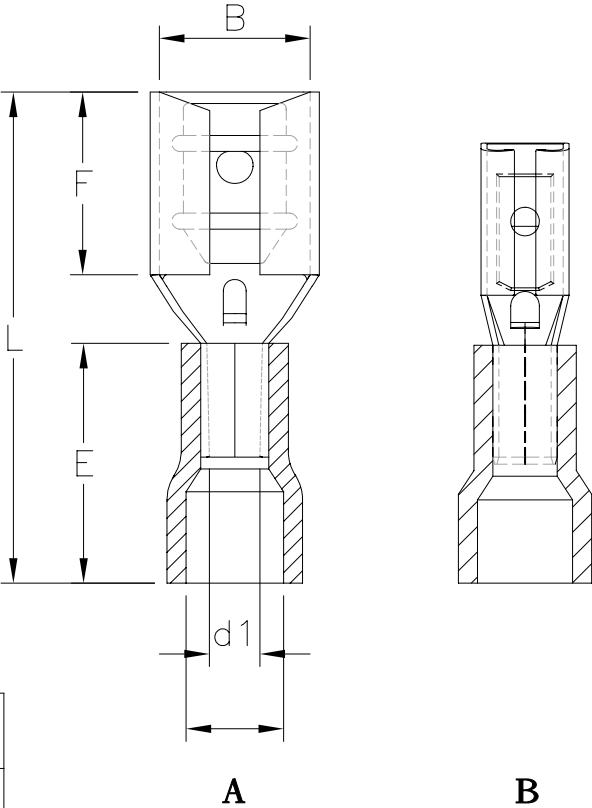

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	NEMA TAB	B ±0.20	F ±0.30	L ±1.00	E ±0.60	D ±0.30	d1 ±0.20	t
16-14 AWG 1.5-2.5 mm ²	Q250-FT8V-14	0.8x6.4	6.6	7.9	21.0	10.0	4.5	2.3	0.4

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

Q250-FT8V-14-LF

SERIES
LEADFREE
14~16 AWG
VINYL
THICKNESS 0.8mm
TIN PLATED
FEMALE

DESCRIPTION: