


MAXIMUM ELECTRIC CURRENT

A. W. G	22	20	18	16	14	12	10
MAX AMP	3	4	7	10	15	20	24

NOTE:

1. MAXIMUM ELECTRICAL RATING: 75 °C 300 VOLTS
2. REINFORCEMENT SLEEVE: D TYPE SLEEVE
3. WIRE RANGE: AWG 22-16/0.5-1.5mm²
INSULATED COLOR: RED
4. WIRE RANGE: AWG 16-14/1.5-2.5mm²
INSULATED COLOR: BLUE
5. WIRE RANGE: AWG 12-10/4-6mm²
INSULATED COLOR: YELLOW

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	NEMA TAB	B ±0.20	F ±0.30	L ±1.00	E ±0.60	D ±0.30	d1 ±0.20
AWG 22-16 0.5-1.5 mm ²	Q250-FT8VFQ-16	0.8x6.4	6.6	7.9	21.5	10.0	4.1	1.7
AWG 16-14 1.5-2.5 mm ²	Q250-FT8VFQ-14	0.8x6.4	6.6	7.9	21.5	10.0	4.8	2.3
AWG 12-10 4-6 mm ²	Q250-FT8VFQ-10	0.8x6.4	6.6	7.9	24.5	13.0	6.5	3.4

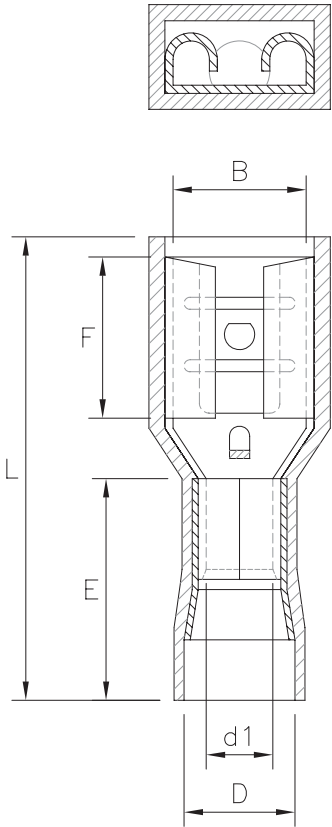

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

Q250-FT8VFQ-xx-LF

SERIES

FEMALE

TERMINAL

0.8mm TAB

FULL

VINYL

10:10~12AWG

14:14~16AWG

16:16~22AWG

Q TYPE

LEADFREE

DESCRIPTION: