

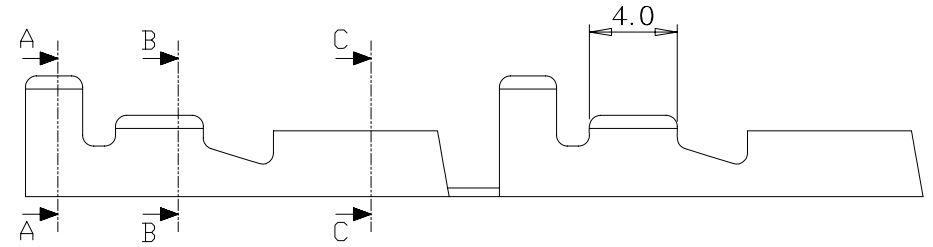


NOTE:
1. 表面處理
鍍錫 60u以上

1.SURFACE TREATMENT:
TIN PLATING
THICKNESS MORE THAN 60u

料厚 0.4 間距 21.5
THICKNESS PITCH

包裝數量 5000 PCS/R
PACKING Q'TY



Q250-Fx8-xx-LF
14:20~14AWG LEADFREE
20:24~20AWG

T:TIN/PLATE
B:BRASS/POLISH

RoHS Compliant

250母		1.0~1.5kg	2.0~3.0kg	4~8kg
編號 PART NO.	處理 FINISH	A點插入力 A INSERTED FORCE	插入力 INSERTED FORCE	拉拔力 TEASILE FORCE

20~14 高腳	3.8	3.4	5.5	5.2	Q250-FT8-14	鍍錫 TIN PLATING
					Q250-FB8-14	素材 NONE
24~20 低腳	3.1	3.4	4.4	4.5	Q250-FT8-20	鍍錫 TIN PLATING
					Q250-FB8-20	素材 NONE
WIRE RANGE	DIM H2	DIM W2	DIM H1	DIM W1	PART NO.	FINISH

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. Q250-Fx8-xx		CHECKED BY CY	TOLERANCES ARE .X±0.2 .XX± .XXX± AWG	DESCRIP TION:	AREA	REVISIONS	HK	DATE	
DWG NO. Q250-Fx8-xx									DRAWING BY
FILE NO.		PROJECTION							
UNIT / mm	SCALE 1:1								