

MATERIAL

INSULATION: NYLON

MATERIAL: BRASS


TIN PLATING

MAXIMUM ELECTRIC CURRENT

A. W. G	22	20	18	16	14	12	10
MAX AMP	3	4	7	10	15	20	24

NOTE:

1. MAXIMUM ELECTRICAL RATING: 105°C 300 VOLTS
2. WIRE RANGE: 22-16 AWG / 0.5-1.5 mm²
INSULATED COLOR: RED
3. WIRE RANGE: 16-14 AWG / 1.5-2.5 mm²
INSULATED COLOR: BLUE
4. WIRE RANGE: 12-10 AWG / 4-6 mm²
INSULATED COLOR: YELLOW
5. MATERIAL THICKNESS: t
TOLERANCE: ±0.05

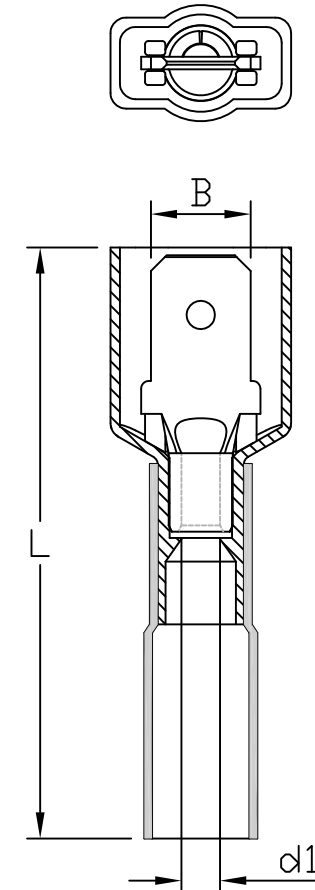

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	NEMA TAB	B ±0.20	L ±2.00	d1 ±0.20	t
22-16 AWG 0.5-1.5 mm ²	Q250-MT8HTNFK-16	0.8x6.4	6.4	38.5	1.7	0.4
16-14 AWG 1.5-2.5 mm ²	Q250-MT8HTNFK-14	0.8x6.4	6.4	39.5	2.3	0.4
12-10 AWG 4-6 mm ²	Q250-MT8HTNFK-10	0.8x6.4	6.4	39.5	3.4	0.4

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PJECTION

照片框

ORDER INFORMATION

Q250-MT8HTNFK-xx-LF

SERIES | | | | | | | | | | LEADFREE
16: 22-16 AWG
14: 16-14 AWG
10: 12-10 AWG
MALE
TERMINAL
THICKNESS 0.8mm
HEAT TUBE
FULL
K TYPE
NYLON

DESCRIPTION: