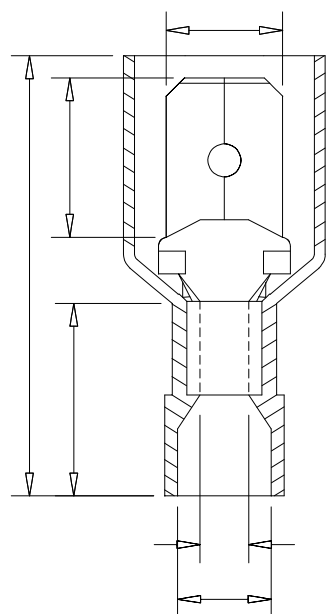



NOTE:
 MAXIMUM ELECTRICAL RATING: 105°C 300 VOLTS
 Q250-MT8NF-16
 1.WIRE RANGE:AWG 22-16/0.5-1.5mm²:10 AMPERE MAX.
 2.INSULATED COLOR: RED
 Q250-MT8NF-14
 1.WIRE RANGE:AWG 16-14/1.5-2.5mm²:15 AMPERE MAX.
 2.INSULATED COLOR: BLUE
 Q250-MT8NF-10
 1.WIRE RANGE:AWG 12-10/4-6mm²:24 AMPERE MAX.
 2.INSULATED COLOR: YELLOW

ITEM NO	A TAB	B ±0.20	F ±0.30	L ±0.10	E ±0.60	d1 ±0.20	D ±0.30
Q250-MT8NF-16	0.8X6.4	6.4	7.9	23.5	10.5	1.7	4.2
Q250-MT8NF-14	0.8X6.4			23.5		2.3	4.9
Q250-MT8NF-10	0.8X6.4	NEM		27.0	13.0	3.4	6.5

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X.±
 .X±
 .XX±
 .XXX±
 ANG±

PPOJECTION

照片框

ORDER INFORMATION

Q250-MT8NF-xx-LF
 SERIES T T T T LEADFREE
 10.14.16AWG
 MALE FULL
 TERMINAL NYLON
 0.8mm TAB

DESCRIPTION: