

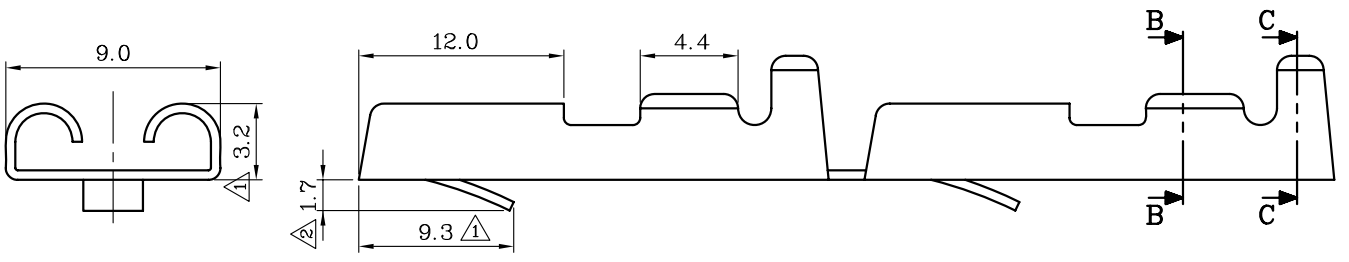


NOTE:
 1. 表面處理
 鍍錫 60u以上
 1.SURFACE TREATMENT:
 TIN PLATING
 THICKNESS MORE THAN 60u

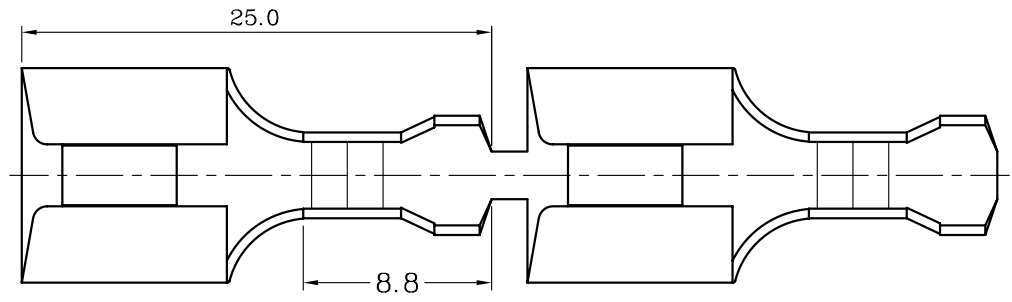

4kg以下 3kg以下
 1.0~1.5kg 1.5kg以下
 插入力 拉拔力
 INSERTED FORCE TEASILE FORCE
 封子件 MATING PART TAB: 0.8t
 料厚 THICKNESS 0.4
 包裝數量 PACKING Q'TY 3000 PCS/R

Q312-Fx8LK-xx-LF
 LEADFREE
 T:TIN 10:12-10AWG
 14:20-14AWG
 B:BRASS
 RoHS Compliant

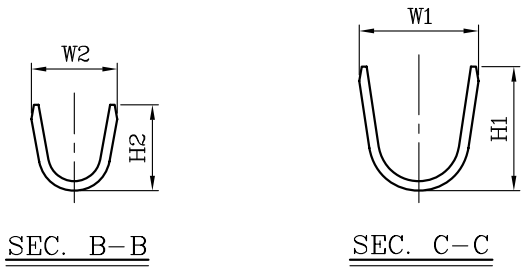

20~14 高腳	3.6	3.7	5.0	5.2	Q312-FT8LK-14	鍍錫 TIN PLATING
					Q312-FB8LK-14	素材 NONE
12~10 超高	5.6 △	4.8 △	6.6 △	6.5 △	Q312-FT8LK-10	鍍錫 TIN PLATING
					Q312-FB8LK-10	素材 NONE
WIRE RANGE	DIM H2	DIM W2	DIM H1	DIM W1	PART NO.	FINISH



煜倫股份有限公司

PART NO. Q312-Fx8LK-xx		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± 0.1 .XXX ± .001 AWG	DESCRIP TION: 312-8多極
DWG NO. Q312-Fx8LK-xx		DRAWING BY			
FILE NO.		PROJECTION		AREA	REVISIONS
UNIT / mm	SCALE 1:1			HK	DATE