


## WIRING DIAGRAM

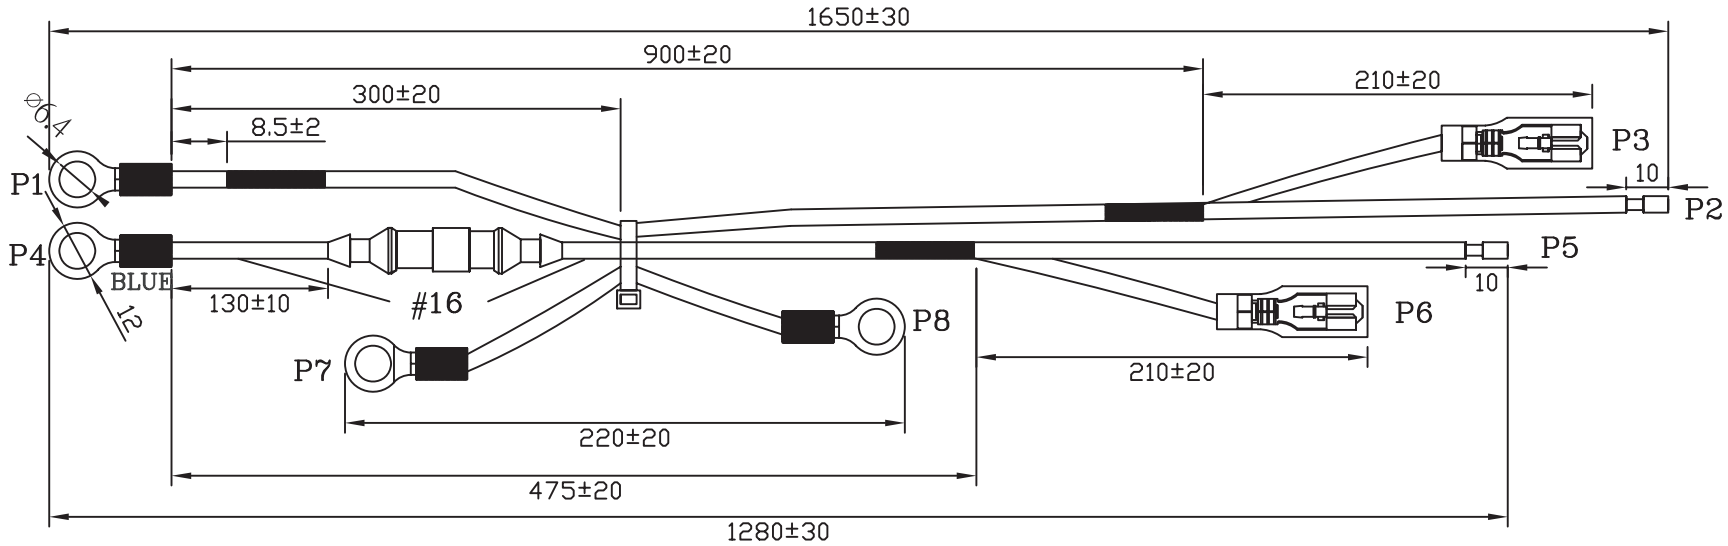


| NO. | PART NO. | Q'TY | UNITS | DESCRIPTION |
|---|---|---|---|---|
| 6 | TIE | 1 | PCS | TIE 2.0*60mm WHITE |
| 5 | TUBE | 3 | PCS | SHRINK TUBE ø5.0*20mm #BLACK |
| 4 | 保險絲盒 | 1 | PCS | CQ-209F2 |
| 3 | TERMINAL | 4 | PCS | ø6.4mm +YELLOW PROTECTIVE COVERING |
| 2 | TERMINAL | 2 | PCS | Q250 +TRANSPARENT PROTECTIVE COVERING |
| 1 | CABLE | 1 | SET | UL1015 12AWG WHITE L:190mm<br>UL1015 12AWG RED L:235mm<br>UL1015 12AWG RED L:1270mm<br>UL1015 12AWG BLACK L:235mm<br>UL1015 12AWG BLACK L:1640mm |

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

| | | |
|---|---|---|
| DRAWING BY CY | | TOLERANCES ARE |
| CHECKED BY GENIUS | | X. ±<br>.X ±<br>.XX ±<br>.XXX ±<br>ANG ± |
| UNIT / mm | SCALE 1 : 1 | |
| DATE | | |
| SIZE A4 | PPOJECTION | |

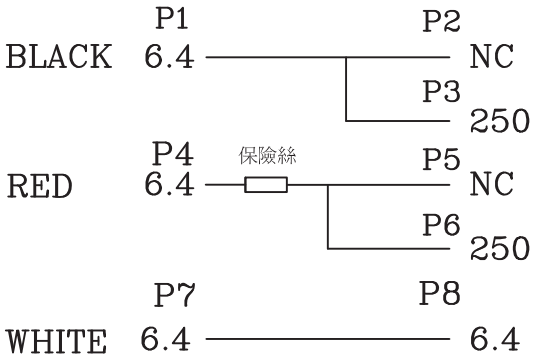照片框

**ORDER INFORMATION**

QTRTX24-686412-F1M65-LF

- SERIES
- 6.3x0.8
- Ø6.4mm
- 12AWG
- FEMALE TO FEMALE
- 1650mm
- LEADFREE

DESCRIPTION: 4.3 O端 /250 F+保險絲盒 L:1650mm