


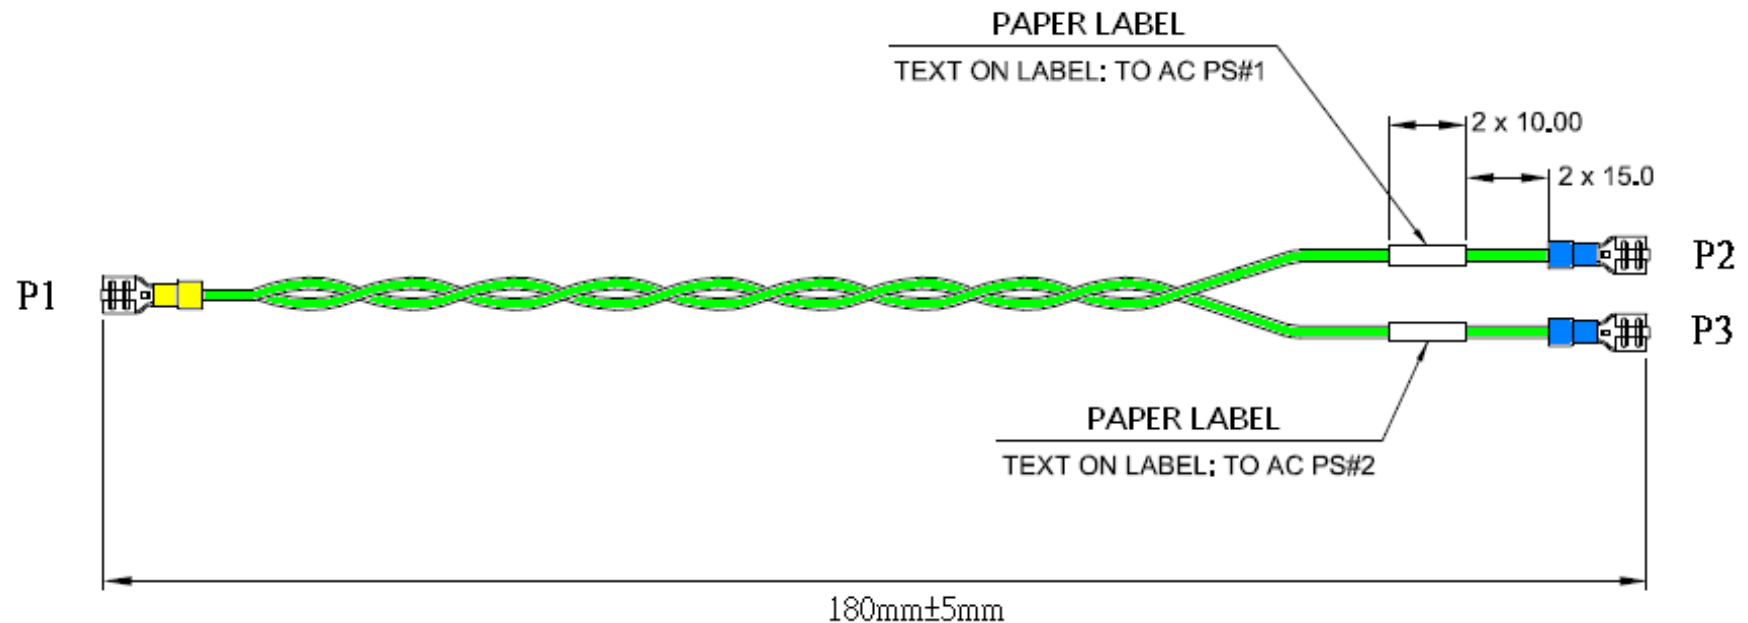

1. P1 : .250×.032(6.3×0.8) FEMALE DISCONNECTOR VINYL INSULATED COLOR=YELLOW
2. P2,P3 : .250×.032(6.3×0.8) FEMALE DISCONNECTOR VINYL INSULATED COLOR=BLUE
3. WIRE IS UL(1015) 16AWG 105℃ 600V PVC JACKET COLOR=GREEN

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

QTX12-6868V16-F18C-LF

SERIES

180mm

16 AWG

LEADFREE

FEMALE TO FEMALE

PVC

6.3X0.8 TO 6.3X0.8

DESCRIPTION: