


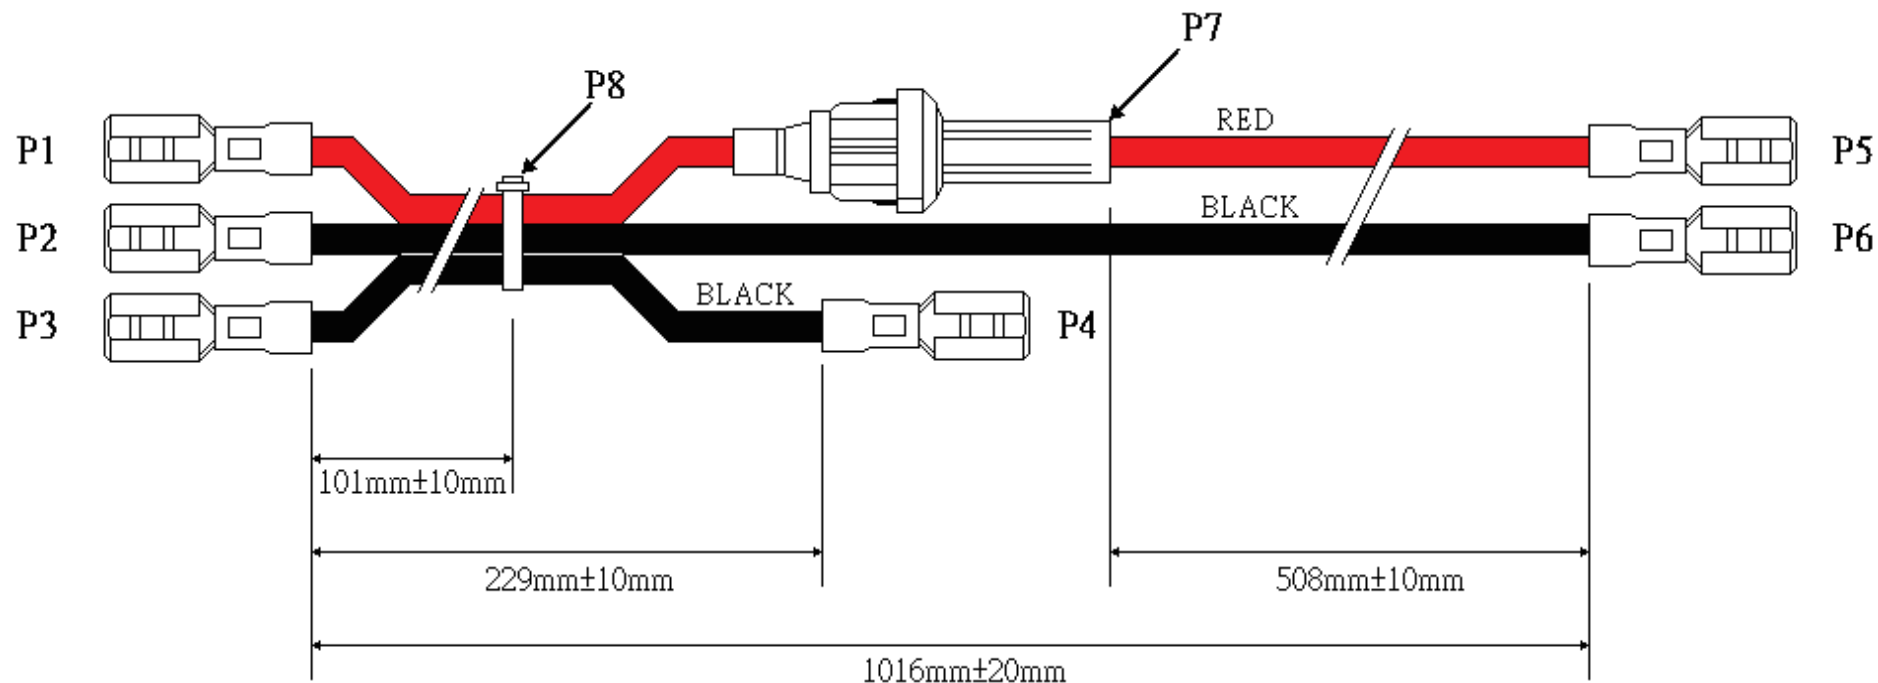

1. P1, P2, P3, P4, P5, P6 : .250 × .032(6.3 × 0.8) FEMALE DISCONNECTOR VINYL INSULATED COLOR=YELLOW
 2. P7 : FUSE AND FUSE HOLDER INLINE 30A 32V COLOR=WHITE
 3. P8 : CABLE TIE COLOR=WHITE
- 4 WIRE IS UL(1015) 16AWG 105°C 600V PVC JACKET

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ± 0.30
.X ± 0.30
.XX ± 0.20
.XXX ± 0.20
ANG ± 1°

照片框

ORDER INFORMATION

QTX33-6868F30A16-F40N-LF
SERIES
6.3X0.8 TO 6.3X0.8
LEADFREE
40 INCH
FEMALE TO FEMALE
16AWG
FUSE 30AMP

DESCRIPTION: