METAL STRIP TYPE NYLON-INSULATED FLAG FEMALE DISCONNECTORS (MS SERIES)

MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16	14
AMP.	3	4	7	10	15

MAXIMUM ELECTRICAL RATING : 105°C 300 VOLTS MAX.
INSULATION MATERIAL : NYLON
INSULATION COLOR :
22-18 A.W.G.: RED 16-14 A.W.G.: BLUE
TERMINAL MATERIAL : BRASS **PITCH** : FIG-1=17.25mm FIG-2=18.8mm

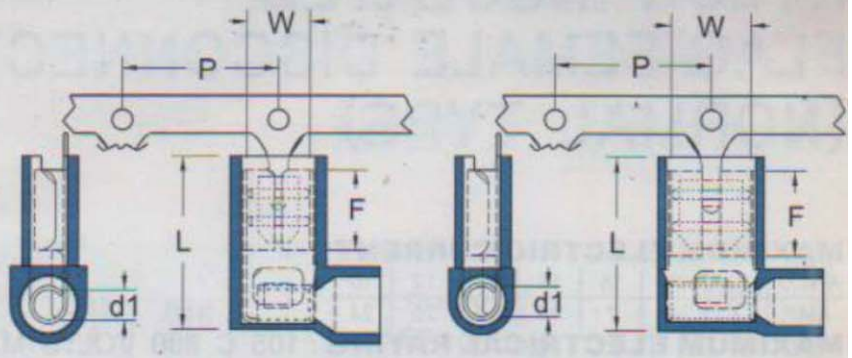

FIG-1 FIG-2

WIRE RANGE A.W.G. mm²	ITEM NO.	NEMA TAB	DIMENSION inch / mm W	F	L	d1	T	FIG	CRIMPING TOOL	Q'TY BOX
22-18 A.W.G. 0.5-0.75 mm²	Q187-GT5NFR-18	.020×.187 (0.5×4.75)	.197 5.0	.276 7.0	.591 15.0	.063 1.6	.016 0.4	1	HT-T01-QGN COLOR:RED	1000
	Q187-GT8NFR-18	.032×.187 (0.8×4.75)								1000
	Q250-GT8NFR-18	.032×.250 (0.8×6.35)	.260 6.6	.299 7.6	.598 15.2			2		1000
16-14 A.W.G. 1.5-2.5 mm²	Q187-GT5NFR-14	.020×.187 (0.5×4.75)	.197 5.0	.276 7.0	.598 15.2	.083 2.1	.016 0.4	1	HT-T01-QGN COLOR:BLUE	1000
	Q187-GT8NFR-14	.032×.187 (0.8×4.75)								1000
	Q250-GT8NFR-14	.032×.250 (0.8×6.35)	.260 6.6	.299 7.6				2		1000

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ± .X ± .XX ± .XXX ± ANG ±
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

Qxxx-GTxNFR-xx-LF
- Q187 / Q250: FLAG TERMINAL
- 5:0.5t / 8:0.8t
- NYLON
- FULL
- REEL
- 14:14~16 AWG
- 18:18~22 AWG
- LEADFREE

DESCRIPTION: