
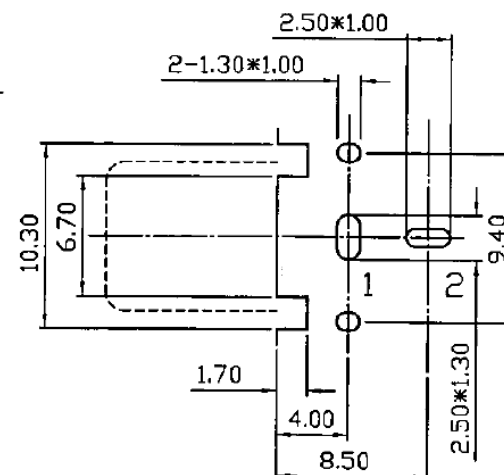
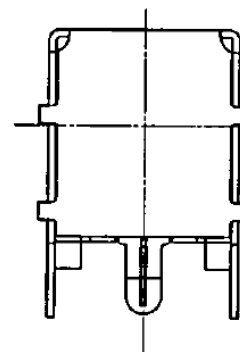
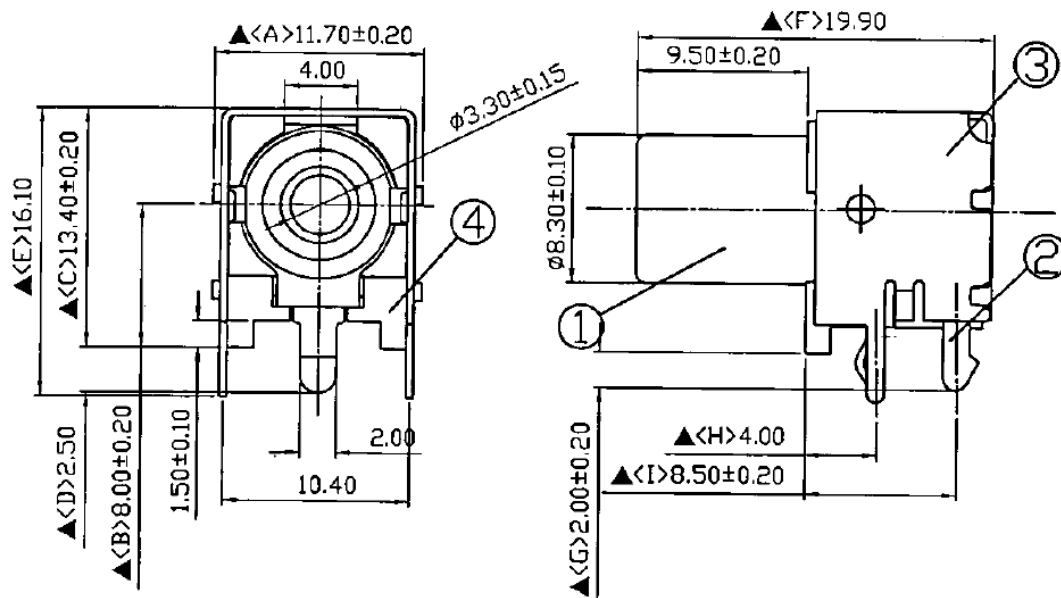


SCHEMATIC		
MODEL NO	U	

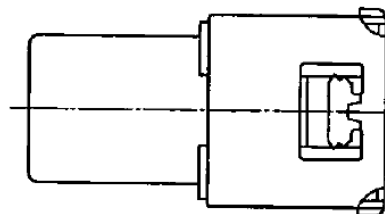

Pin Hole Layout
(Jack Bottom View)

4.	Housing	PBT	1	Black Color
3.	Metal Shell	0.4T Iron	1	Nickel Plated
2.	Pin	0.6T Brass	1	Silver Plated
1.	Earth Terminal (Barrel)	0.4T Brass	1	Nickel Plated
NO.	Description	Material	Q'TY	Finish

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X ± 0.30
X ± 0.30
XX ± 0.20
XXX ± 0.10
ANG ± 1°

照片框

ORDER INFORMATION

RCA-JR44MBK-02-LF

SERIES JACK DIP 90° 02 WAY LEADFREE
BLACK METAL FOOT
4.0+4.5mm

DESCRIPTION: