

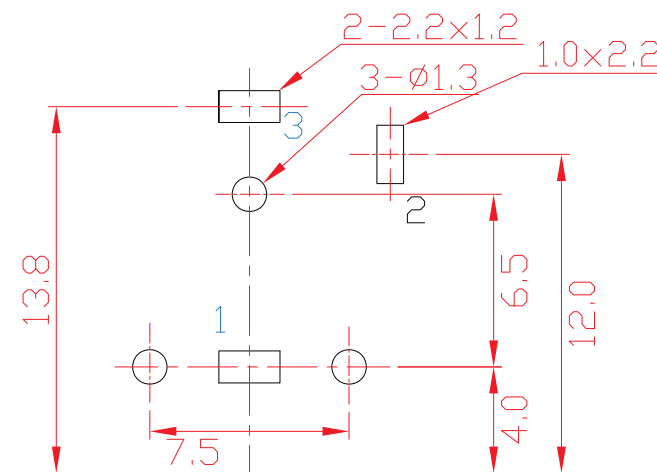


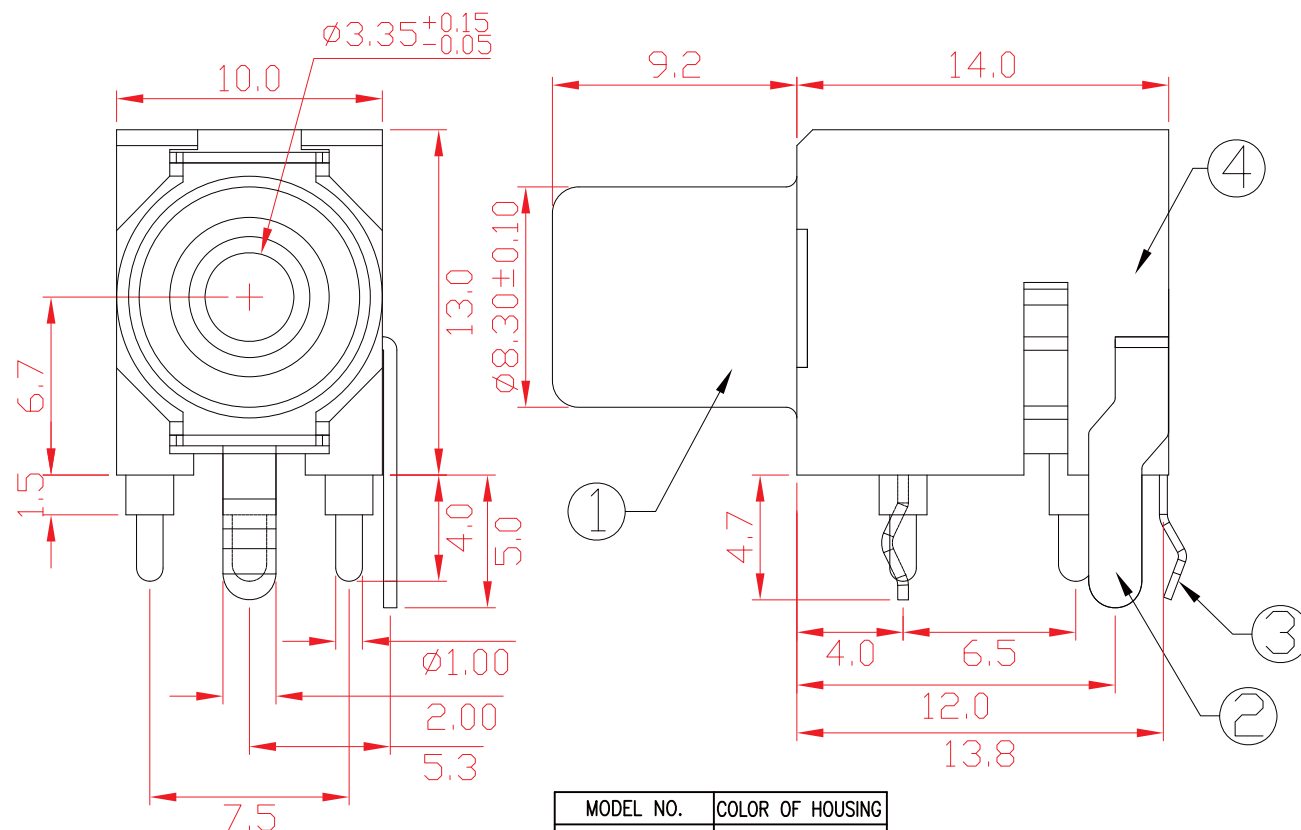

PCB EDGE
(COMPONENT SIDE)
PCB LAYOUT

MODEL NO.	COLOR OF HOUSING
RCA-JR48P3BK-03	BLACK
RCA-JR48P3YL-03	YELLOW
RCA-JR48P3RD-03	RED
RCA-JR48P3WH-03	WHITE
RCA-JR48P3OR-03	ORANGE

NO.	NAME	MATERIAL	FINISH	Q'TY
1	BARREL	BRASS T:0.4	NICKEL PLATED	1
2	TERMINAL	BRASS T:0.5	TIN PLATED	1
3	SPRING TERM.	PHOS.BRZONE T:0.3	TIN PLATED	1
4	HOUSING	PBT G.F.	W.R.Y.B.GR.BL.OR	1



Specification:

Contact Resistance: 30m Ohm Max. At AC 100mA Max.1KHz.

Insulation Resistance: 100M Ohm Min. At 500V DC.

Rated Voltage And Current: DC 12V,2A Max.

Dielectric Withstanding Voltage: 500VAC At 60Hz For 1 Minute.

Durability (Life Test): 4000 Cycles.

Insertion Force: 0.3~3.0 Kg.

Extraction Force: 0.3~3.0 Kg.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.13
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

RCA-JR48P3xx-03-LF
SERIES JACK DIP 90° 4.0+8.0mm POST x 3
LEADFREE
03 WAY
BK:BLACK
YL:YELLOW
RD:RED
WH:WHITE
OR:ORANGE

DESCRIPTION: