

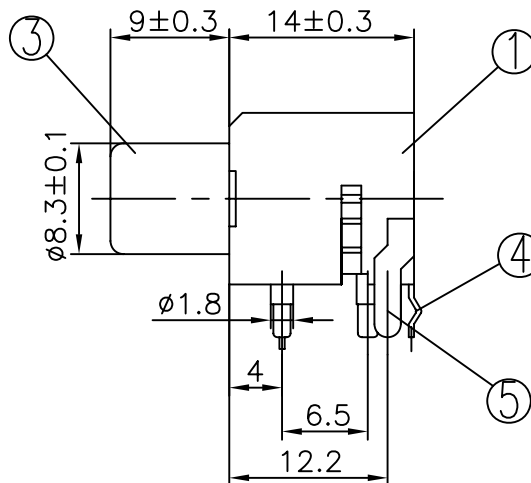
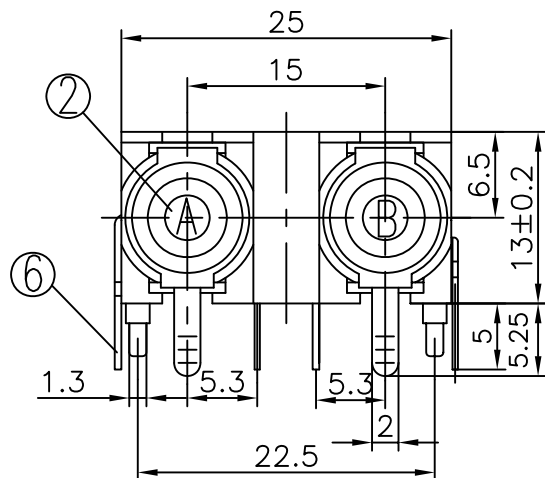


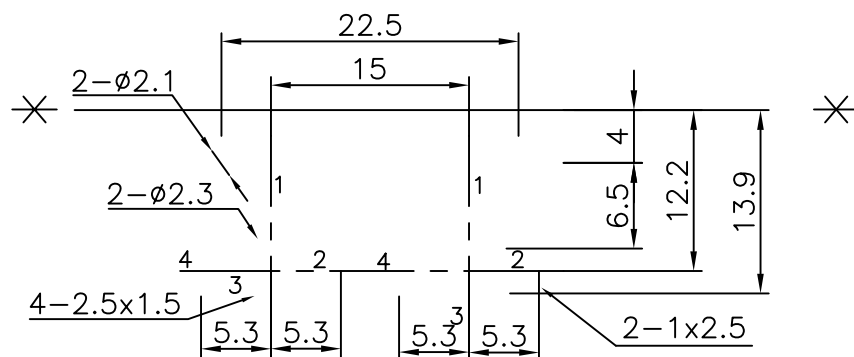

TYPE	A	B
	COLOR	

Outer Contact



T:1.6 Dimensions of PC board holes

Tolerance : ± 0.1 (Printed-bottom view)

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

MODEL NO.	RCAA2-JR40E0xx-04C	RCAA2-JR40E0xx-02	RCAA2-JR40E0xx-03B
SCHEMATIC			

6	TERMINAL	2	QSn6.5-0.1y	t=0.5	MB:Cu	Cu/Sn	PLATED
5	SHUNT SPRING	2	QSn6.5-0.1y	t=0.5	MB:Cu	Cu/Sn	PLATED
4	RING SPRING	2	QSn6.5-0.1y	t=0.4	MB:Cu	Cu/Sn	PLATED
3	OUTER CONTACT	2	H65	t=0.4	MB:Cu	Ni	PLATED
2	WASHER	2	PBT				
1	HOUSING	1	PBT				
LTR	PART NAME	QTY	MATERIAL		REMARK		

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

RCAA2-JR40E0xx-xxx-LF

SERIES

JACK
DIP 90°

LEADFREE
SCHEMATIC
RW:RED / WHITE
WR:WHITE / RED

EAR
4.0mm

DESCRIPTION: