

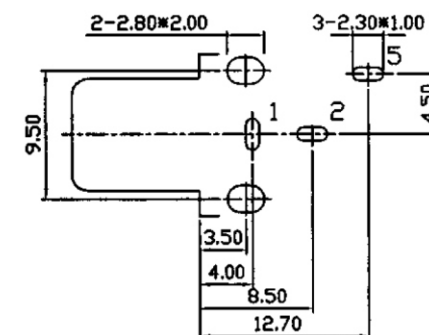
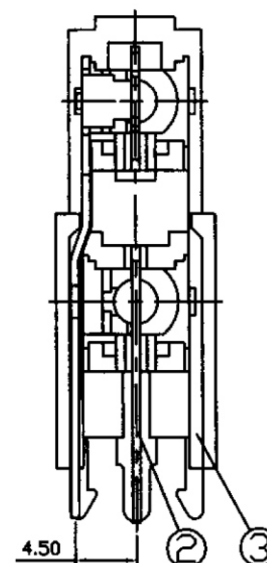
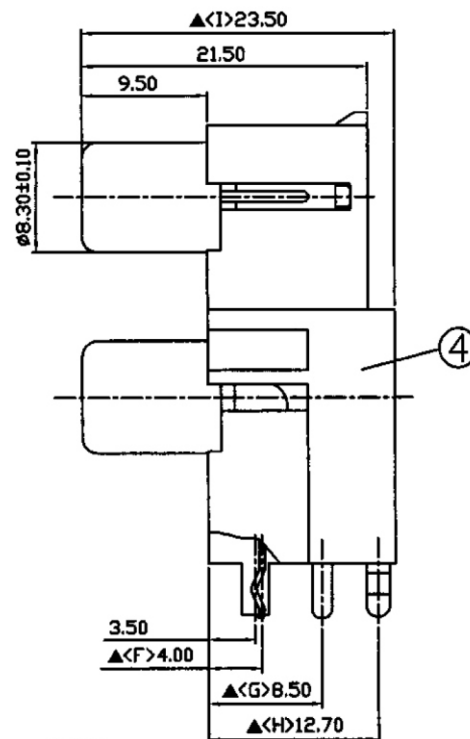


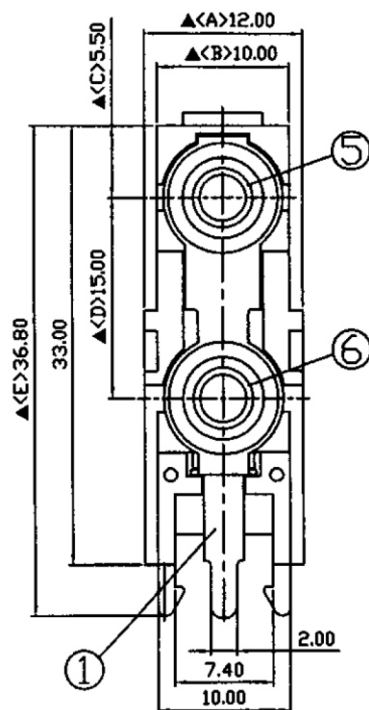

Pin Hole Layout
(Jack Bottom View)

6.	Washer D	PBT	1	White Color
5.	Washer T	PBT	1	Red Color
4.	Housing	ABS	1	Black Color
3.	Terminal T	0.6T Brass	1	Silver Plated
2.	Terminal D	0.6T Brass	1	Silver Plated
1.	Earth Terminal (Barrel)	0.4T Steel	1	Nickel Plated
NO.	Description	Material	Q'TY	Finish



SPECIFICATIONS:

Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲ : The Most Important Dimension

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ±
 .X ± 0.20
 .XX ± 0.10
 .XXX ±
 ANG ±

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

RCAB1-JR40E0RW-03-LF

SERIES JACK 4.0mm DIP 90°
 LEADFREE
 03 WAY
 RED/WHITE
 NON EAR

DESCRIPTION: