

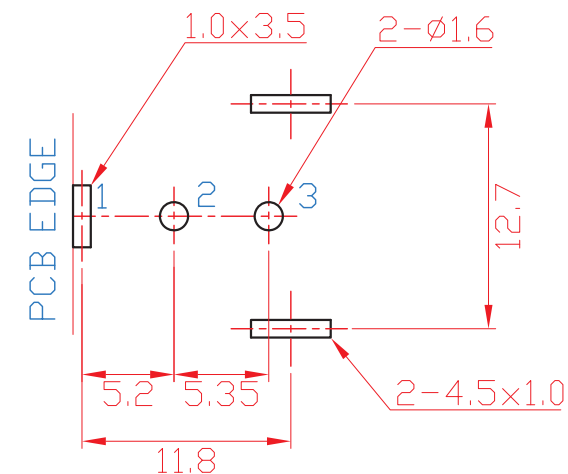


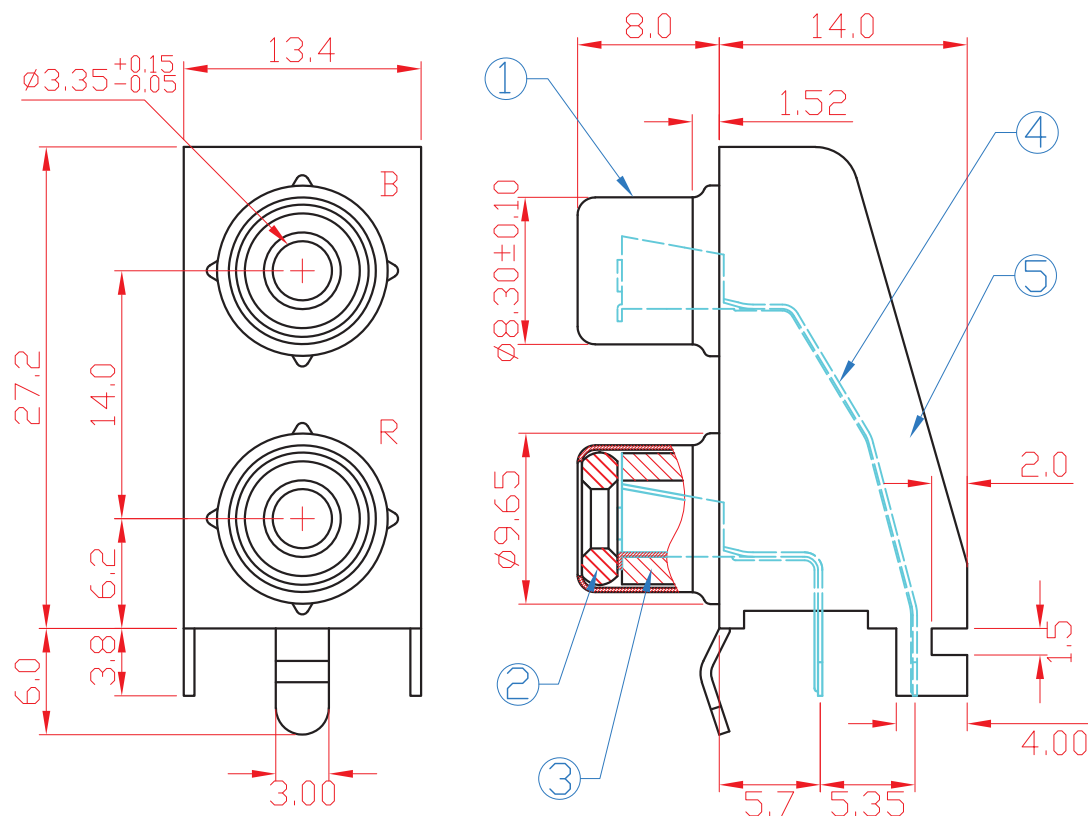

PCB LAYOUT
(BOTTOM VIEW)

NO.	NAME	MATERIAL	FINISH	Q'TY
1	BARREL	C.R.S. T:0.30	GOLD PLATED	2
2	INSERT RING	PBT G.F.	BLACK,RED	2
3	INSULATOR	PBT G.F.	WHITE	2
4	CENTER PIN	BRASS T:0.25	GOLD PLATED	2
5	FRAME	C.R.S. T:0.60	GOLD PLATED	1



Specification:

Contact Resistance: 30m Ohm. Max. At AC 100mA Max.1KHz.
Insulation Resistance: 100M Ohm Min. At 500V DC.
Rated Voltage And Current: DC 12V,2A Max ; AC 100V,1A Max.
Dielectric Withstanding Voltage: 500VAC At 60Hz For 1 Minute.
Durability (Life Test): 4000 Cycles.
Insertion Force: 0.3~3.0 Kg.
Extraction Force: 0.3~3.0 Kg.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.38

.X ± 0.25

.XX ± 0.13

.XXX ± 0.05

ANG ±

PPOJECTION



ORDER INFORMATION

RCAB1-JR52E0KRG01-03-LF
SERIES JACK DIP 90° 5.2mm GOLD RED BLACK NON EAR
LEADFREE 03WAY

DESCRIPTION: