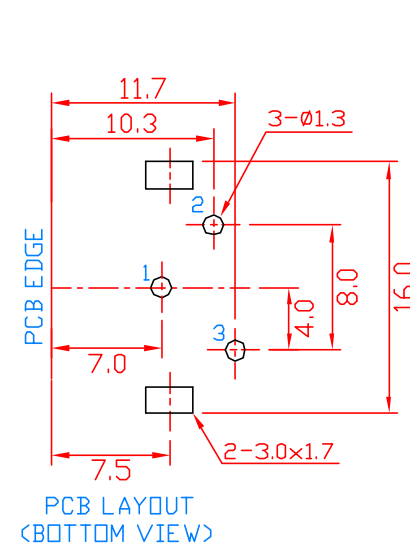
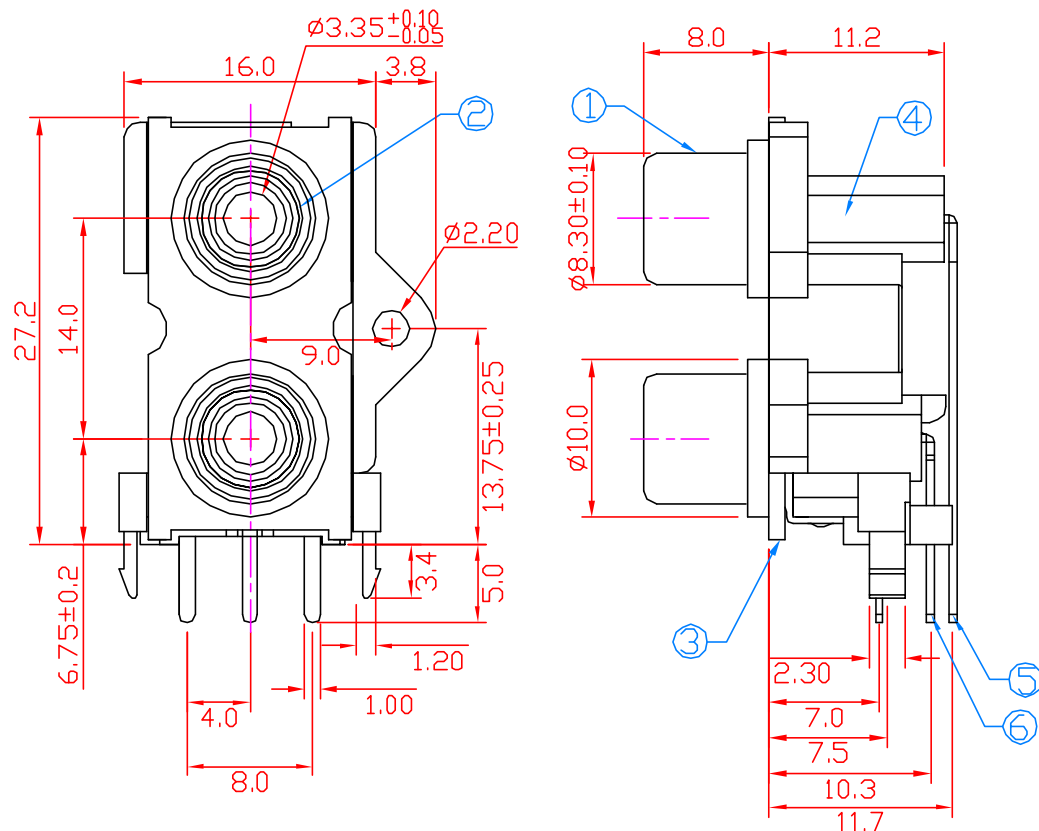


WHITE

RED

INSERT RING COLORS

Specification:

Contact Resistance: 30m Ohm. Max. At AC 100mA Max. 1KHz.

Insulation Resistance: 100M Ohm Min. At 500V DC.

Rated Voltage And Current: DC 12V, 2A Max ; AC 100V, 1A Max.

Dielectric Withstanding Voltage: 500VAC At 60Hz For 1 Minute.

Durability (Life Test): 4000 Cycles.

Insertion Force: 0.3~3.0 Kg.

Extraction Force: 0.3~3.0 Kg.

NO.	NAME	MATERIAL	FINISH	Q'TY
1	BARREL	BRASS T:0.4	NICKEL PLATED	1
2	INSERT RING	PBT G.F.	WHITE, RED	2
3	COVER	ABS	BLACK	1
4	HOUSING	ABS	WHITE	1
5	TOP TERM.	BRASS T:0.5	TIN PLATED	1
6	BOTTOM TERM.	BRASS T:0.5	TIN PLATED	1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.38
X. ± 0.25
.XX ± 0.13
.XXX ± 0.05
ANG $\pm$

照片框

ORDER INFORMATION

RCAB1-JR70E1WR-03-LF

SERIES

JACK

7.0mm

DIP 90°

LEADFREE

03 WAY

WHITE+RED

DESCRIPTION: RCA JACK