

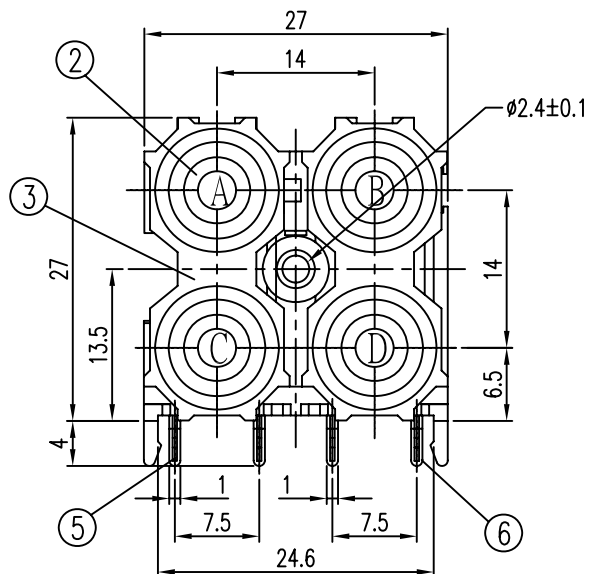
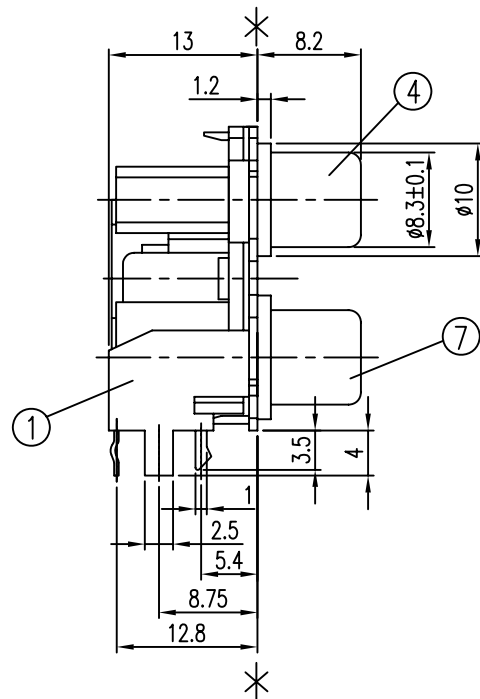


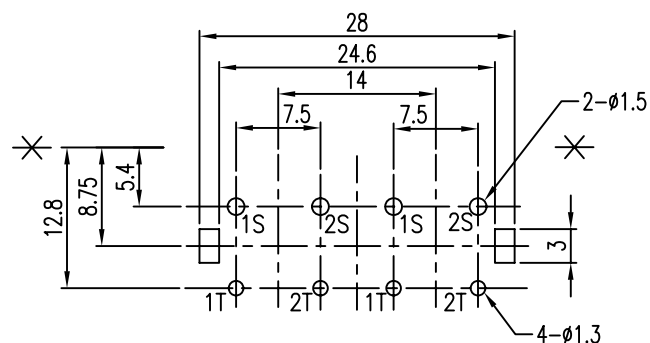

WASHER COLOR	
A	B
C	D
WHITE	WHITE
RED	RED

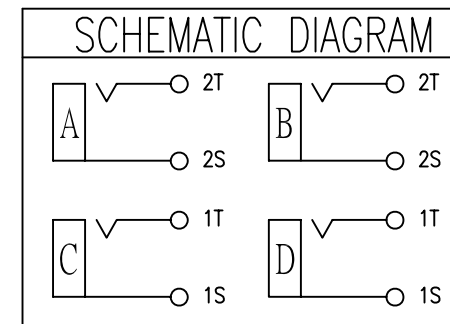

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.1 (Printed-bottom view)

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

7	OUTER CONTACT	2	C2680	t=0.35	Cu/Sn	PLATED
6	TERMINAL	2	C2680	t=0.4	Cu/Sn	PLATED
5	TERMINAL	2	C2680	t=0.4	Cu/Sn	PLATED
4	OUTER CONTACT	2	C2680	t=0.35	Cu/Sn	PLATED
3	COVER	2	ABS		UL-94HB	
2	WASHER	4	PBT		UL-94V0	
1	HOUSING	1	PBT		UL-94V0(BLACK)	
LTR	PART NAME	QTY	MATERIAL		REMARK	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

RCAB2-JR54E1WR-02-LF

SERIES JACK
LEADFREE
02 WAY
WHITE/RED
EAR
5.4mm
DIP 90°

DESCRIPTION: PIN JACK