

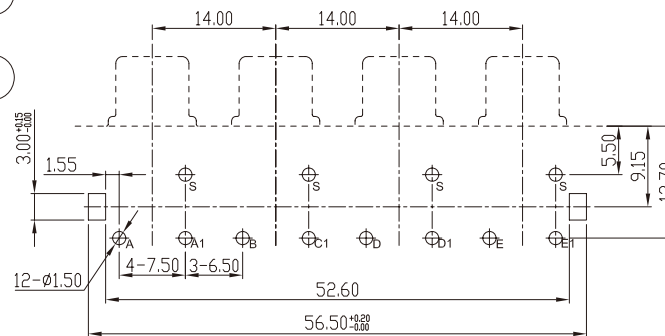
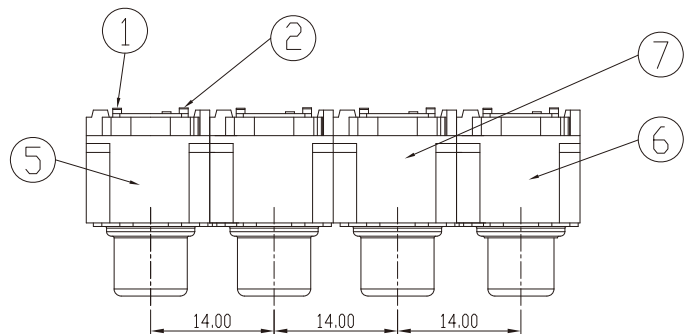


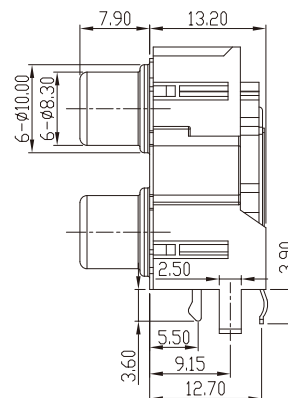

P.C.B LAYOUT TOL=0.1mm
(BOTTOM VIEW)

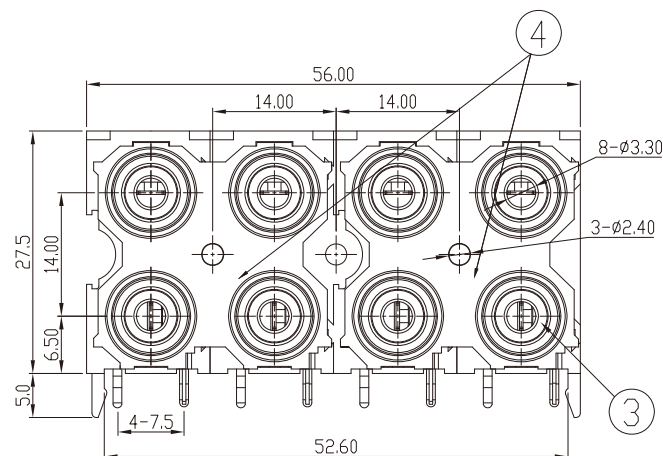

7	BODY(3)	2	P.B.T		BLACK
6	BODY(2)	1	P.B.T		BLACK
5	BODY(1)	1	P.B.T		BLACK
4	SHIELD	2	BRASS	NICKEL	
3	WASHER	8	P.B.T		
2	TERMINAL(L)	4	BRASS	Sn/Cu	
1	TERMINAL	4	BRASS	Sn/Cu	
NO	PART NAME	Q'TY	MATERIAL	PLATED	REMARK

Circuit				Insulator Color			
A1	B1	C1	D1	A1	B1	C1	D1
WHITE	WHITE	WHITE	WHITE	WHITE	WHITE	WHITE	WHITE
A	B	C	D	A	B	C	D
RED	RED	RED	RED	RED	RED	RED	RED

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±

DATE

.XXX±

SIZE A4

PPOJECTION

ANG ±

照片框

ORDER INFORMATION

RCAB4-JR55E3xxxx-03-LF

SERIES

JACK

DIP 90°

LEADFREE

03 WAY

WWW:WH/WH/WH/WH

RD/RD/RD/RD

5.5mm

EAR

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com