

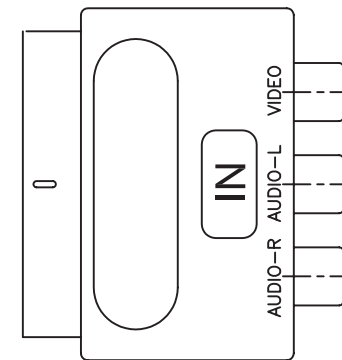
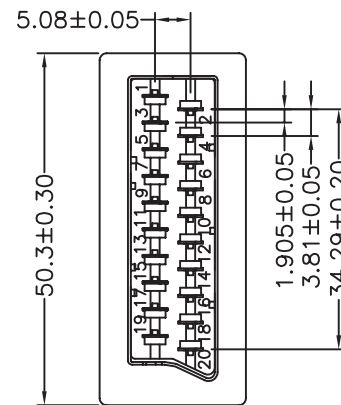
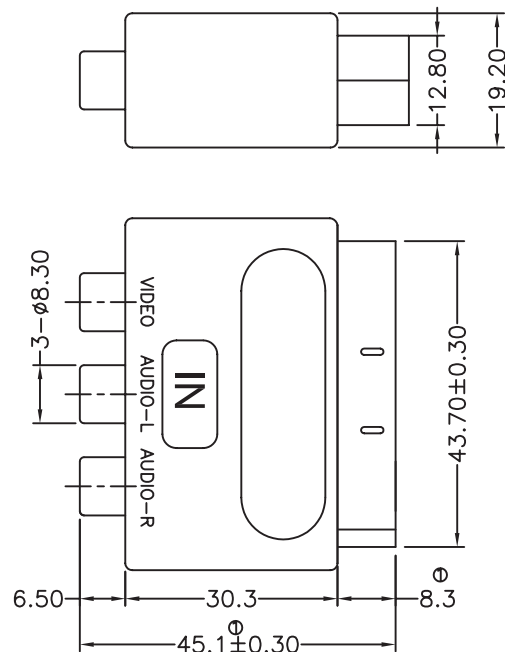


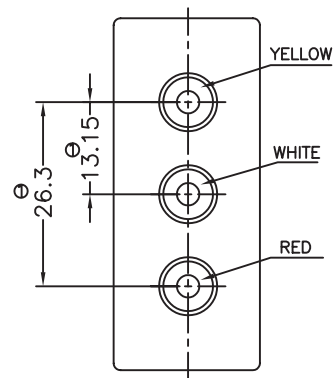

焊線方法

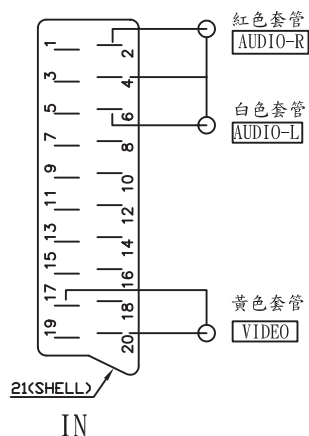

NOTES:

1.MATERIALS

- 1.1 Insulator: P.C. Or P.B.T.
- 1.2 Contact:Brass 0.3T
- 1.3 Shell:ABS

2.SPECIFICATIONS

- 2.1 Current Rating: 1Amp
- 2.2 Dielectric Strength: 1000V AC for one minute
- 2.3 Insulator Resistance: 5000 M ohms Min
- 2.4 Contact Resistance: 8m ohms Max
- 2.5 Operation Temperature: -55°C to +105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X.±
X.±
.XX±
.XXX±
ANG±

PPOJECTION

照片框

ORDER INFORMATION

RCSC-AAIN-0305-LF

SERIES IN LEADFREE
03 TO 05C WAY
ASSEMBLY
FEMALE TO MALE

DESCRIPTION: 3RCA對一個SCART公頭 (IN)