

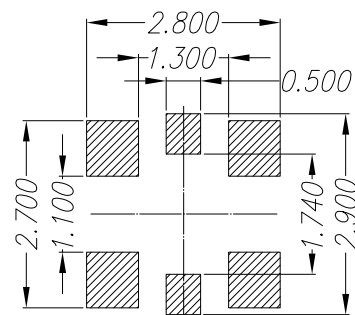






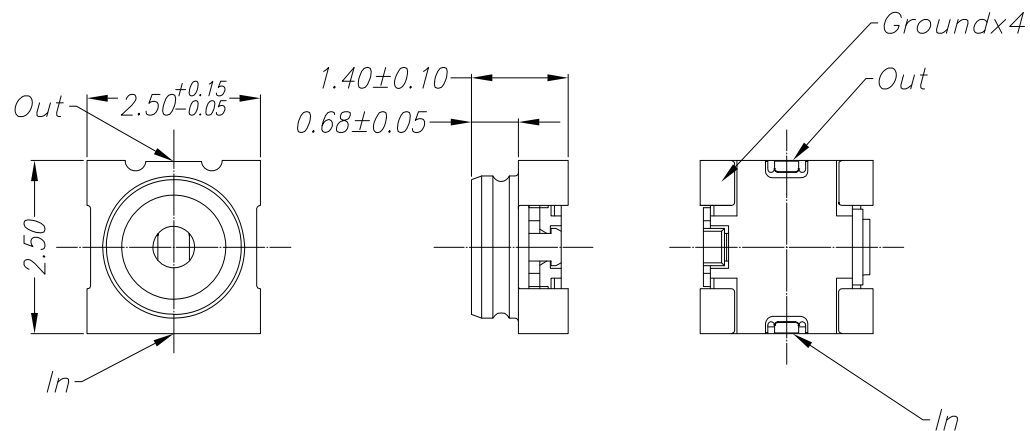

Recommend PCB Layout

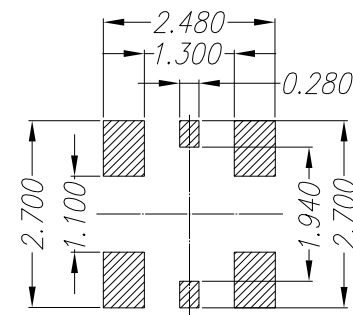

Recommend Stencil Mask Pattern
(Mask Thickness 0.08mm)

Note:

1. Material Specification:

- 1-1. Housing: High Temperature Thermoplastic
- 1-2. Contact: High Performance Copper Alloy
- 1-3. Shielding Cover: High Performance Copper Alloy

2. Plating Specification:

- 2-1. Contact: 50u" Nickel underplating overall
Gold Flash on contact area & solder tails
- 2-2. Shielding Cover: 50u" Nickel underplating overall
Gold Flash on contact area & solder tails

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.10
.XXX ± 0.06
ANG ±





照片框

ORDER INFORMATION

RFS21-JV14R-50-LF

SERIES
LEADFREE
50 OHM
REEL
HIGH 1.4mm
180° SMT
JACK

DESCRIPTION: RF Switch Connector 2.5x2.5x1.40mm SMT OD2.10mm GF

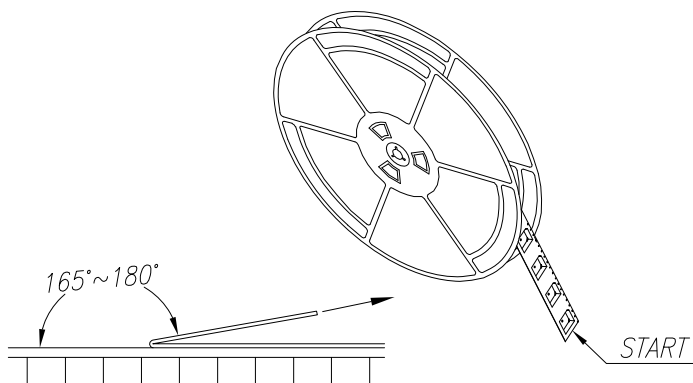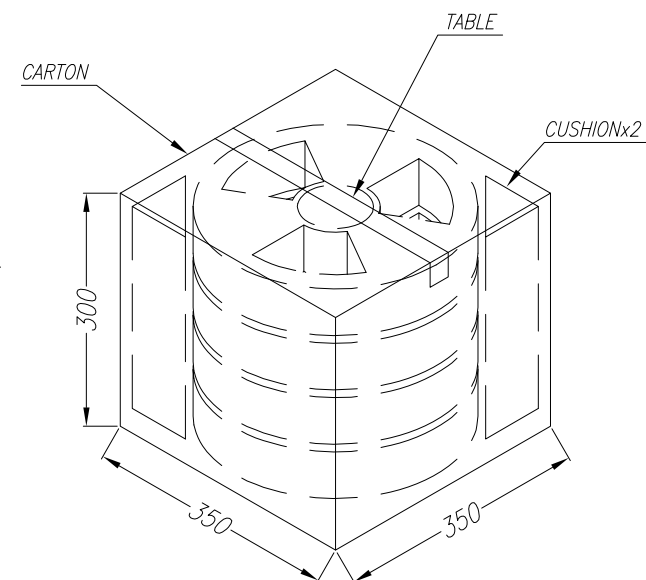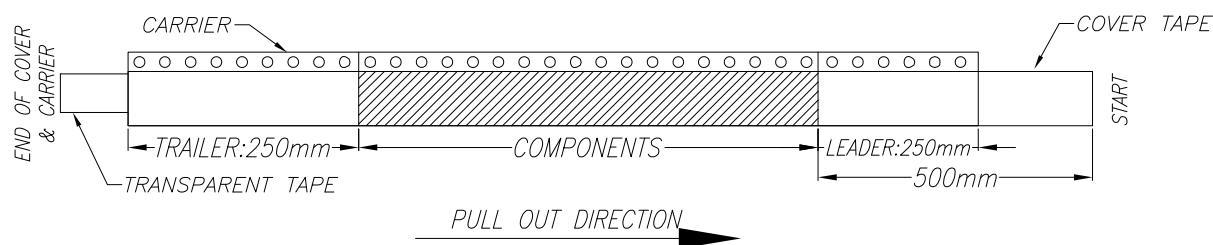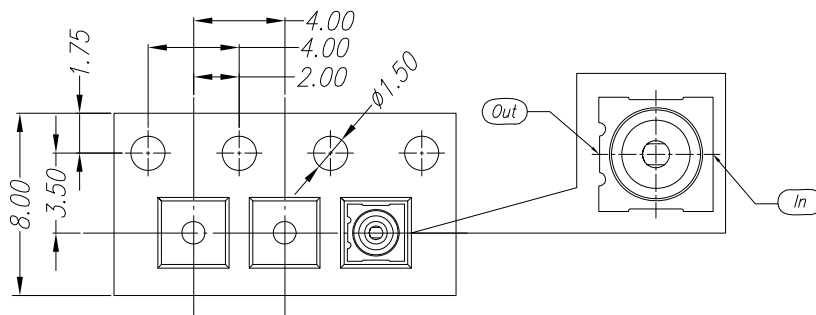

	PCS/REEL	REEL/CARTON	SUM(PCS)	N.W.(KG)	G.W.(KG)
CONNECTOR	7,000	20	140,000	-	10.1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.10
.XXX ± 0.06
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

RFS21-JV14R-50-LF

SERIES
LEADFREE
50 OHM
REEL
HIGH 1.4mm
180°SMT
JACK

DESCRIPTION: RF Switch Connector 2.5x2.5x1.40mm SMT OD2.10mm GF