


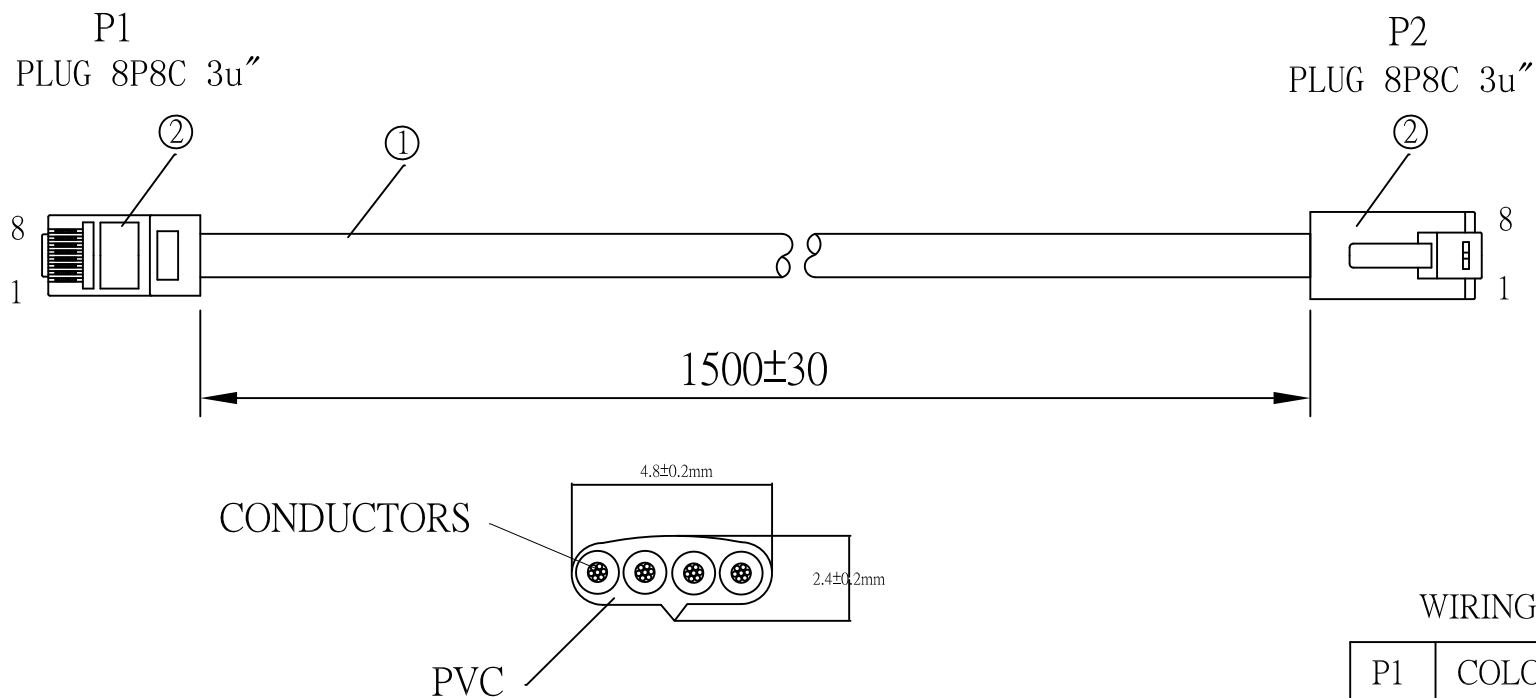

WIRING:P1-P1

P1	COLOR	P2
1	N.C	1
2	N.C	2
3	BROWN	3
4	YELLOW	4
5	GREEN	5
6	WHITE	6
7	N.C	7
8	N.C	8

SPECIFICATION:

1.COMPONENT:

- A.Size of conductors Tinse : 4C NO UL 28AWG(7*0.12)
- B.Color coded insulation : (P.P)white.green.Yellow.brown
- C.Diameter of electric: 0.95±0.03mm.

2.PLUG:Modular U.S F type 8p4c ,golden plate 3u\"/>

3.JACKET MATERIAL. :PVC.

- A.Overall diameter : Ave 4.8*2.4mm
- B.Color. :black

NOTE: All Materials/Processes are RoHS Compliant

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

RJX2-08080428-M1M5-LF
SERIES LEADFREE
1500mm
MALE TO MALE
28 AWG
8P4C TO 8P4C WAY

DESCRIPTION: MODULAR 8P4C PLUG L:1.5M BLACK