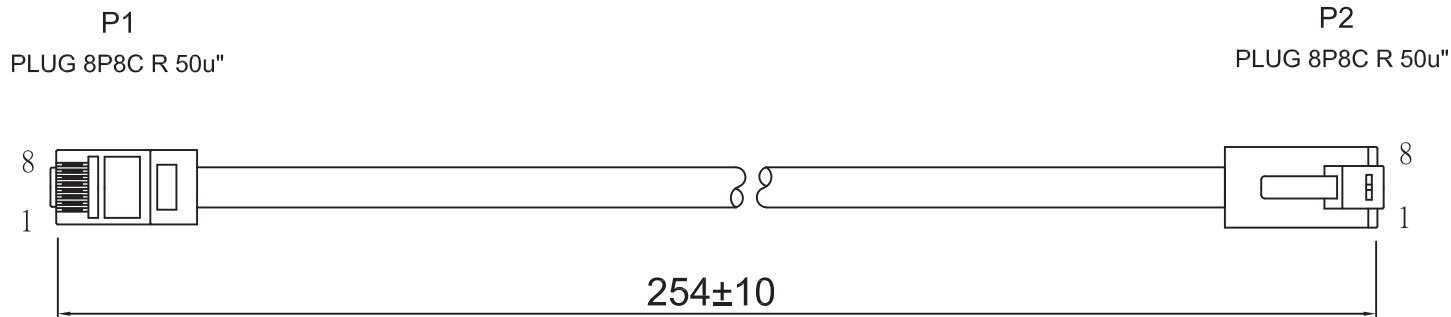


SPECIFICATION:

CABLE:1.COMPONENT:

- A.Size of conductors :CAT.5 24AWG (0.20*7) stranded round cable.
 B.Color coded insulation :(P.P)green,white/green ;brown,white/brown;
 blue;white/blue;orange,white/orange.
 C.Diameter of dielectric :0.99±0.05mm.
 D.UL style no.of single :(30v, 60°C).
 E.Number of twist pairs :Four pairs.

2.JACKET MATERIAL. :PVC

- A.Overall diameter :Ave 5.5mm
 B.Color. : GREEN

- PLUG: 1.TYPE :Modular U.S. R TYPE 8P8C ,golden plate 30u".
 2.MATERIAL: :PC UL 94V-2

P1	COLOR	P2
1		1 BROWN
2		2 BROWN/WHITE
3		3 ORANGE/WHITE
4		4 BLUE/WHITE
5		5 BLUE
6		6 ORANGE
7		7 GREEN
8		8 GREEN/WHITE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

RJX2-080824C5E-M10N-LF

SERIES

8P8C

24 AWG

CAT.5E

254mm

LEADFREE

MALE TO MALE

DESCRIPTION: UTP CABLE A'SSY L:254mm GREEN