

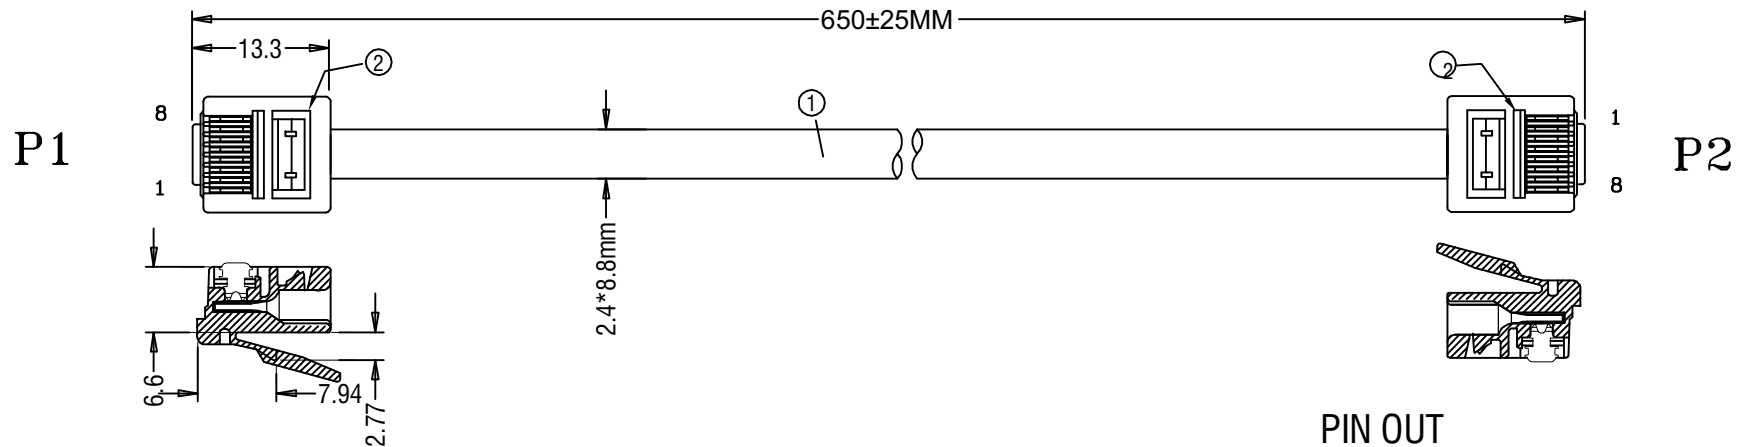


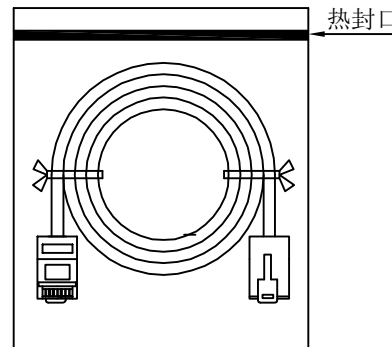

PAKING: 单PCS如图理线包装 ,



PIN OUT

A		B
8	GREY	1
7	ORANGE	2
6	BLACK	3
5	RED	6
4	GREEN	4
3	YELLOW	5
2	BLUE	7
1	BROWN	8

NOTES:

1. ELECTRICAL TEST: 100% OPEN. SHORT & MISS WHERE TEST
2. CONDUCTOR RESISTANCE: 5.0 OHMS MAX.
3. INSULATOR RESISTANCE: DC300V/0.01S 500K OHM MIN.

NO.	SPECIFICATION STANDARD	QTY
②	RJ45 8P8C CRYSTAL HEAD GOLD-PLATED F 3U"	2
①	CABLE: NO UL 26AWG (7/0.12BC)*8C OD: 2.4*8.8MM PVC JACKET, COLOR: SILVER (银灰色) 扁线.	1

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

RJX2-080826FS2-M65C-LF			
SERIES			LEADFREE
			650mm
			MALE TO MALE
			FLAT OUTLET SHORT
			26 AWG
			08 WAY TO 08 WAY

DESCRIPTION: RJ45 8P8C 水晶頭雙頭短頭CABLE SILVER (银灰色) 扁线 L=650MM

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG±