



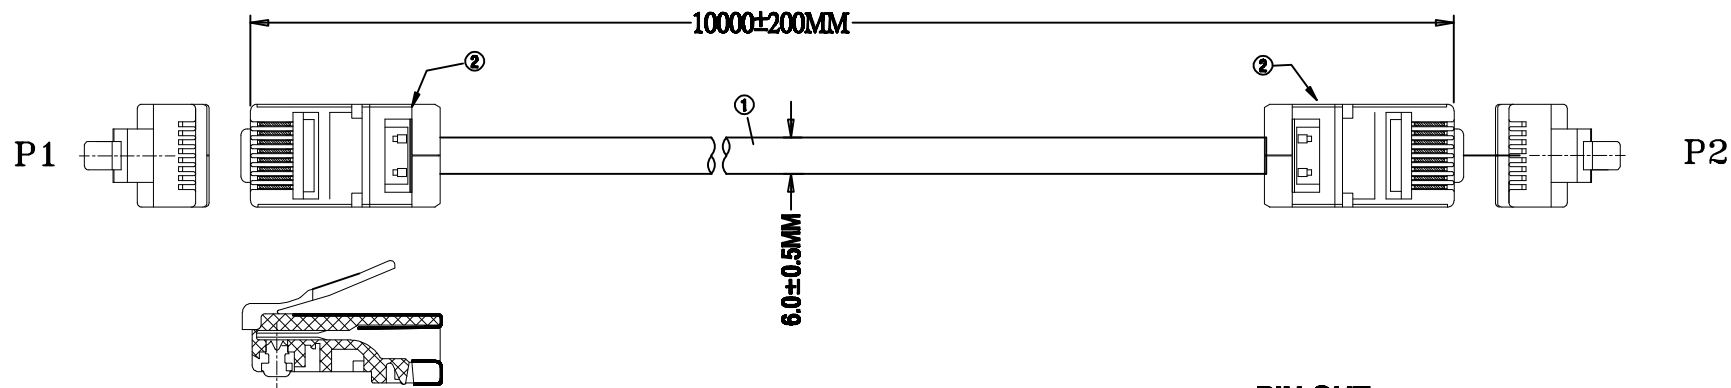

PAKING: 单PCS如图理线包装,

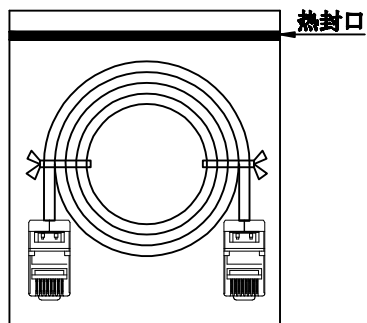

NOTES:

- 1.ELECTRICAL TEST:100% OPEN.SHORT & MISS WHRE TEST
- 2.CONDUCTOR RESISTANCE:5.0HMS MAX.
- 3.INSULATOR RESISTANCE:DC300V/0.01S500K OHM MIN.

PIN OUT

A	B
1	1 WHITE/ORANGE
2	2 ORANGE
3	3 WHITE/GREEN
6	6 GREEN
4	4 BLUE
5	5 WHITE/BLUE
7	7 WHITE/BROWN
8	8 BROWN
SHELL	SHELL

NO.	SPECIFICATION STANDARD	QTY
③	热缩管标签	2
②	RJ45 8P8C CRYSTAL HEAD GOLD-PLATED F 1U"	2
①	CABLE:CAT. 6 STP 24AWG (CCA)*4P+D OD:6.0MM PVC JACKET, COLOR:BLACK.	1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

RJX2-0808FM24C6-M10M-LF

SERIES

08 TO 08

LEADFREE
10000mm
MALE TO MALE
CAT.6
24 AWG
FULL METAL

DESCRIPTION: CTT. 6 STP 8P8C 水晶頭雙頭铁壳 CABLE 黑色 L=10M