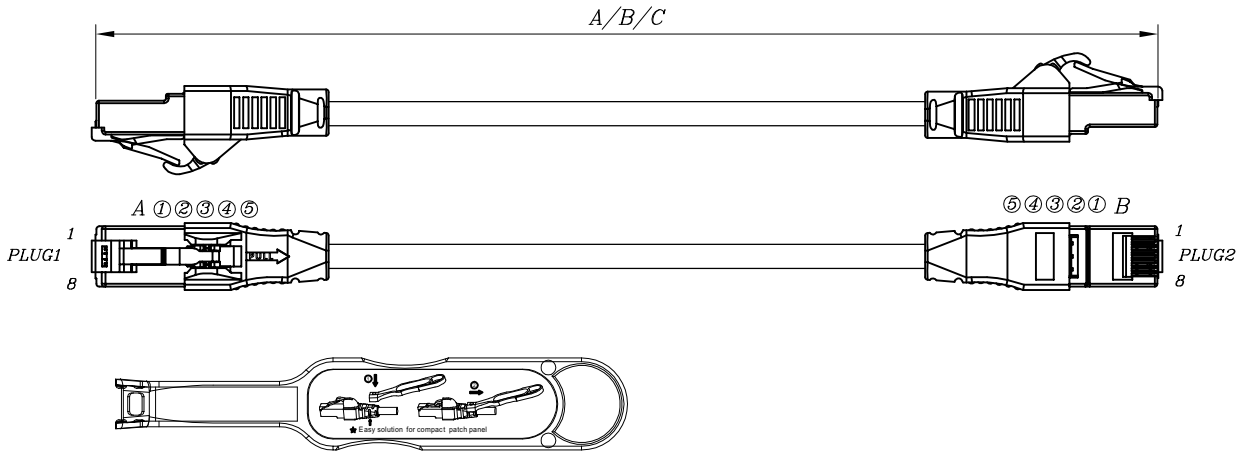

PLUG:

Drawing						
Mark					✓	✓
GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"	50u"
Mark						✓

TYPE	Shielded	Unshielded
Mark		✓

PC	UL 94-V0	UL 94-V2
Mark		✓

ARRANGE METHOD:



Remarks:

I. "A" indicate Length 1~10M(10M not included), tolerance $^{+80}_{-0}$

II. "B" indicate Length 10~20M(20m included), tolerance $^{+150}_{-0}$

III. "C" indicate Length above 20M(20m not included), tolerance +(C*1%)/-0

项次 ITEM	品名 DESCRIPTION	规格 MATERIAL	颜色 COLOR	用量 Q'TY	项次 ITEM	品名 DESCRIPTION	规格 MATERIAL	颜色 COLOR	用量 Q'TY
①	PLUG	C6R5Z50V2SIL-2R	transparent	2	⑦				
②	Insert	I1.1 V2	transparent	2	⑧				
③	grab hook	PC	/	1	⑨				
④	boot top cover	PC	/	1	⑩				
⑤	boot	PC	/	1	⑪				
⑥	Cable Tie	"C" MM	white	2	⑫				

线材规格 MATERIAL			线位 WIRE CONNECTION TABLE 颜色								裁线长度 LENGTH	合计 TOTAL	模号 MOLD NO.
			white/orange	orange	white/green	blue	white/blue	green	white/brown	brown			
CAT.6 SSTP 26AWG PATCH CORD	PVC	✓	A1	A2	A3	A4	A5	A6	A7	A8	(A/B/C+80)*[19(0)]*[19(0)]		01-102B
	LSOH		B1	B2	B3	B4	B5	B6	B7	B8			01-099
CABLE COLOR		red	orange	yellow	green	blue	purple	gray	white	black			01-100

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ±
		.XX ±
DATE		.XXX ±
		ANG ±
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

RJX2-0808FM26C6-M1M-LF

- SERIES
- 08 TO 08
- FULL METAL
- 26 AWG
- CAT.6
- MALE TO MALE
- 1000mm
- LEADFREE

DESCRIPTION: