

WIRING:568B

P1 COLOR P2

1 —WH-OR— 1

2 —ORANGE— 2

3 —WH-GR— 3

6 —GREEN— 6

4 —BLUE— 4


5 —WH-BL— 5

7 —WH-BR— 7

8 —BROWN— 8

Drain wire To Drain wire

NOTE:XXTWISTED PAIR

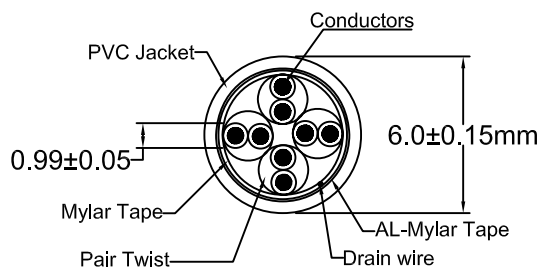

SPECIFICATION:

CABLE: 1.COMPONENT:

A.Size of conductors :CAT.5e STP 24AWG (0.2*7) stranded round cable.

B.Color coded insulation :(P.P) white/orange-orange,white/green-green,white/blue-blue,white/brown-brown.

C.Diameter of dielectric :0.99±0.05mm.

E.Plenum Shield :Mylar Tape,Drain Wire,AL-Mylar Tape.

D.UL style no.of single :(30v, 60°c).

F.Number of twist pairs :Four pairs.

2.S.R: :PVC 75P Molding

3.JACKET MATERIAL. :PVC

A.Overall diameter :Ave 6.0mm

B.Color. :X

PLUG: 1.TYPE - :Modular U.S. Shielded type 8p8c, golden plate 50u".

2.MATERIAL :PC UL 94v-2

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

照片框

ORDER INFORMATION

RJX2-0808xxFM24C5E-M20C-LF

SERIES

08 TO 08

BK:BLACK

BG:BEIGE

24 AWG

FULL METAL

CAT.5e

LEADFREE

200mm

MALE TO MALE

DESCRIPTION: STP CABLE MOLDING L:0.2M