


WIRING:568B

P1	COLOR	P2
1	—WH-OR—	1
2	⊗ ORANGE ⊗	2
3	—WH-GR—	3
6	⊗ GREEN ⊗	6
4	—BLUE—	4
5	⊗ WH-BL ⊗	5
7	—WH-BR—	7
8	⊗ BROWN ⊗	8

Drain wire To Drain wire
NOTE:⊗TWISTED PAIR

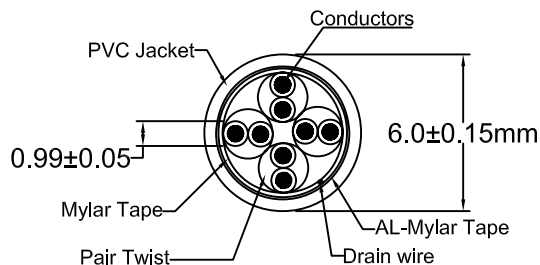

SPECIFICATION:

CABLE: 1.COMPONENT:

- A.Size of conductors :CAT.5e STP 24AWG (0.2*7) stranded round cable.
- B.Color coded insulation :(P.P) white/orange-orange,white/green-green,white/blue-blue,white/brown-brown.
- C.Diameter of dielectric :0.99±0.05mm.
- E.Plenum Shield :Mylar Tape,Drain Wire,AL-Mylar Tape.
- D.UL style no.of single :(30v, 60°c).
- F.Number of twist pairs :Four pairs.

2.S.R: :PVC 75P Molding

3.JACKET MATERIAL. :PVC

A.Overall diameter :Ave 6.0mm

B.Color. :X

PLUG: 1.TYPE - :Modular U.S. Shielded type 8p8c, golden plate 50u".

2.MATERIAL :PC UL 94v-2

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

RJX2-0808xxFM24C5E-M80C-LF

SERIES

08 TO 08

BK:BLACK
BG:BEIGE

FULL METAL

CAT.5e

24 AWG

LEADFREE

800mm

MALE TO MALE

DESCRIPTION: STP CABLE MOLDING L:0.2M