
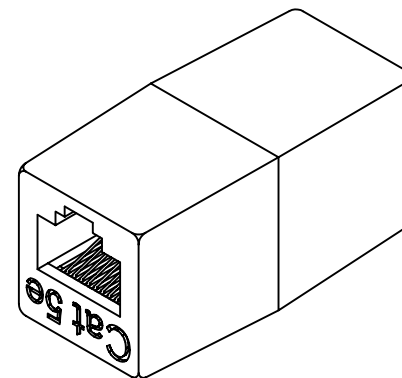

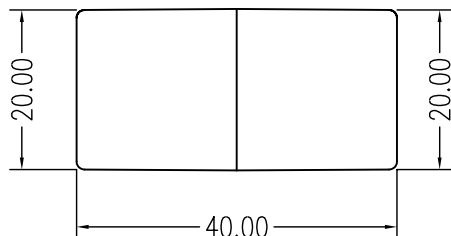




MATERIAL

Housing: ABS, UL 94V-0

Spring Wire: Phosphor Bronze with 50u

" Gold over 100u" Nickel undercoat

Temperature: -40°C ~ 70°C

Humidity: 10% ~ 90% RH

Modular jack: 750 mating cycles

ELECTRICAL

Current rating: 1.5 Amps

Insulation resistance: 500 MOhm

Contact resistance: 20 mOhm

DC resistance: 0.1 Ohm

Dielectric withstanding voltage: 1000 V

Cat 5e
UL CERTIFIED



ACCORDING TO TIA/EIA-568-B-2
REQUIREMENTS
FILE NO.E145249

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

RJX2-FSC5E40-0808-LF
SERIES
CAT.5E
FEMALE TO FEMALE
8P8C
LONG 40.0mm
LEADFREE

DESCRIPTION: