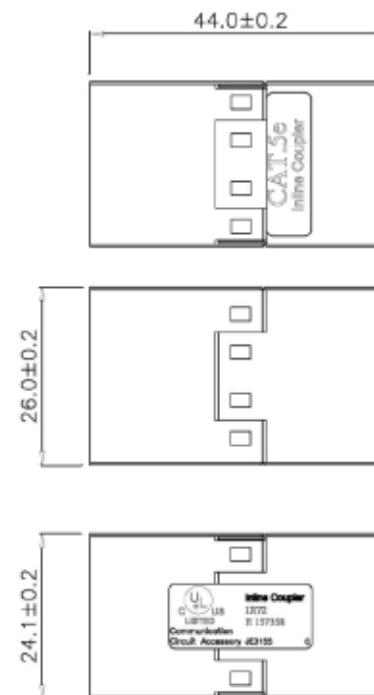

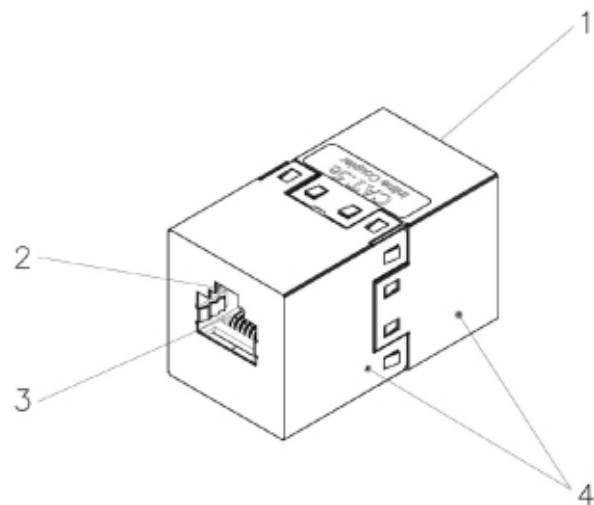


Specification :

Material :

1. Plastic Housing : ABS, UL 94V-0.
2. RJ45 Housing : PBT, UL 94V-0.
3. RJ45 Contact material & finished :
 - 3-1. Phosphor Bronze with 50-60 micro-inch Nickel plated.
 - 3-2. Contact area: Min. 3mm 50 micro-inch Gold plated.
4. Shield : Bronze with Nickel plated.

Performance :

- a. The IDC color codes combine two wirings of T568A & T568B.
- b. Insertion Force : 900 gms for 8 contacts.
- c. Retention Strength : 7.7 kgs between Jack and Plug.
- d. Operation Temperature : -40°C to 80°C.
- e. Durability:
 - e-1. Jack : 750 cycles Plug-Jack mating and unmating test, Insertion cycles at 20 cycles/minute max. Contact resistance test per 100 cycles.

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

RJX2-FSC5PX44FM-0808-LF
 SERIES | LEADFREE
 8P8C
 FULL METAL
 LONG 44.0mm
 NON PANEL
 CAT.5
 FEMALE TO FEMALE

DESCRIPTION:

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±