
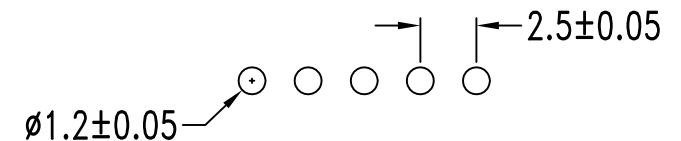
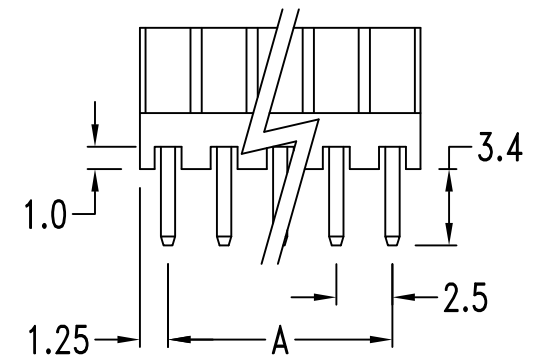
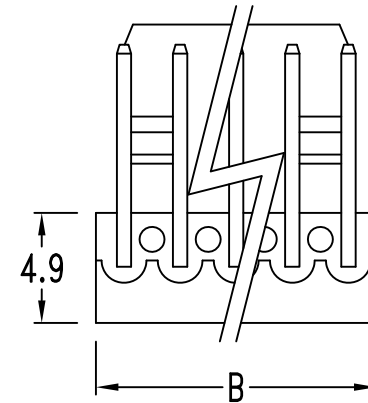


Features:

- 2 ~ 20 circuits available
- .025"(0.64mm) square pin
- Friction lock
- Various pin length available
- UL 94V-0 nylon 66
- Tin-plated brass pin. Plating options available

Specifications:

- Current rating: 3A Max.
- Voltage rating: 250V AC, DC
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C

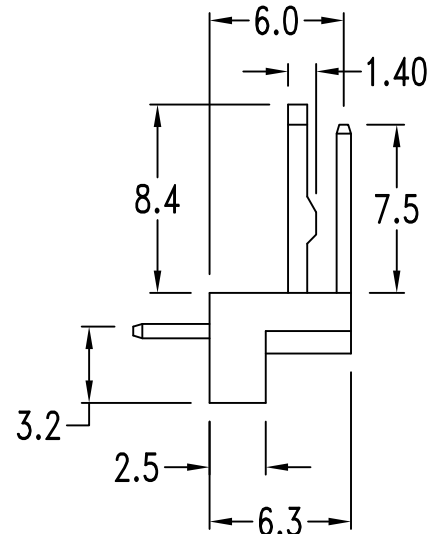

P.C.B. Hole Dimensions

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	2.5	5.0	9	20.0	22.5	16	37.5	40.0
3	5.0	7.5	10	22.5	25.0	17	40.0	42.5
4	7.5	10.0	11	25.0	27.5	18	42.5	45.0
5	10.0	12.5	12	27.5	30.0	19	45.0	47.5
6	12.5	15.0	13	30.0	32.5	20	47.5	50.0
7	15.0	17.5	14	32.5	35.0			
8	17.5	20.0	15	35.0	37.5			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

RK-RB-xx-LF
SERIES LEADFREE
02~20WAY
BRACKET
DIP 90°

DESCRIPTION: