

Specifications:

Current Rating:3.0A AC,DC

Voltage Rating:250V AC,DC

Contact Resistance:20mohm Max

Insulation Resistance:1000Mohm Min.

Withstanding Voltage:1000V AC/minute

Operating Temperature Range:-40°C~+85°C

Material And Finish:


Insulator:Nylon 66 (UL94V-0)

Insulator Color:Beige

Contact:Brass

Plating:Tin Plated

| POS. | Dim A | Dim B | POS. | Dim A | Dim B |
|------|-------|-------|------|-------|-------|
| 2    | 2.50  | 5.00  | 7    | 15.00 | 17.50 |
| 3    | 5.00  | 7.50  | 8    | 17.50 | 20.00 |
| 4    | 7.50  | 10.00 | 9    | 20.00 | 22.50 |
| 5    | 10.00 | 12.50 | 10   | 22.50 | 25.00 |
| 6    | 12.50 | 15.00 |      |       |       |

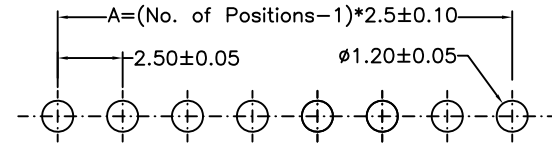

P.C.B layout

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X, ±  
.X ± 0.20  
.XX ± 0.15  
.XXX ±  
ANG ±

照片框

ORDER INFORMATION

RM-D-xx-LF  
SERIES | LEADFREE  
02~10WAY  
DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 2.5mm Wire To Board Wafer Straight Type