



P2

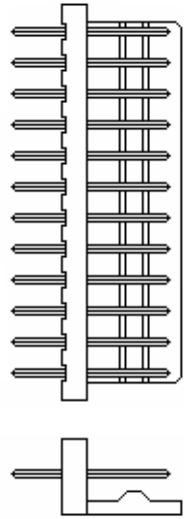

( WAFER-10P 180°DIP )


- 12 BLACK
- 11 BROWN
- 10 RED
- 9 ORANGE
- 8 YELLOW
- 7 GREEN
- 6 BLUE
- 5 PURPLE
- 4 GRAY
- 3 WHITE
- 2 BLACK
- 1 BROWN

P1

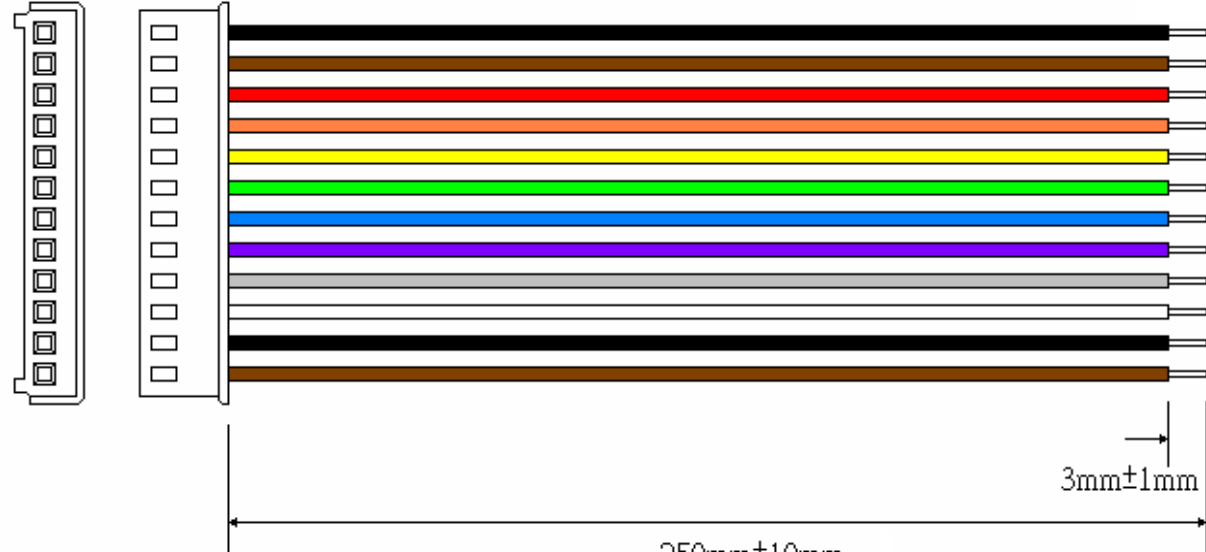

STRIPPED TINNED

1. P1 : 2.5mm PITCH CRIMP TERMINAL AND HOUSING -12P  
COLOR=MILKY YELLOW
2. P2 : 2.5mm PITCH WAFER-12P 180°DIP TYPE CONTACT  
TIN PLATED INSULATOR COLOR=MILKY YELLOW
3. WIRE IS UL ( 1007 ) 24AWG 80°C 300V PVC JACKET

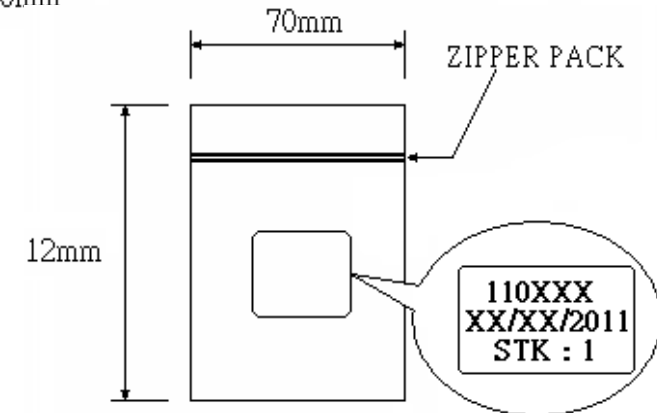

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

RMX1-120024-FD25C-LF

SERIES

12 WAY

24 AWG

FEMALE+MALE DIP 180°

LEADFREE

250mm

FEMALE+MALE DIP 180°

DESCRIPTION: