


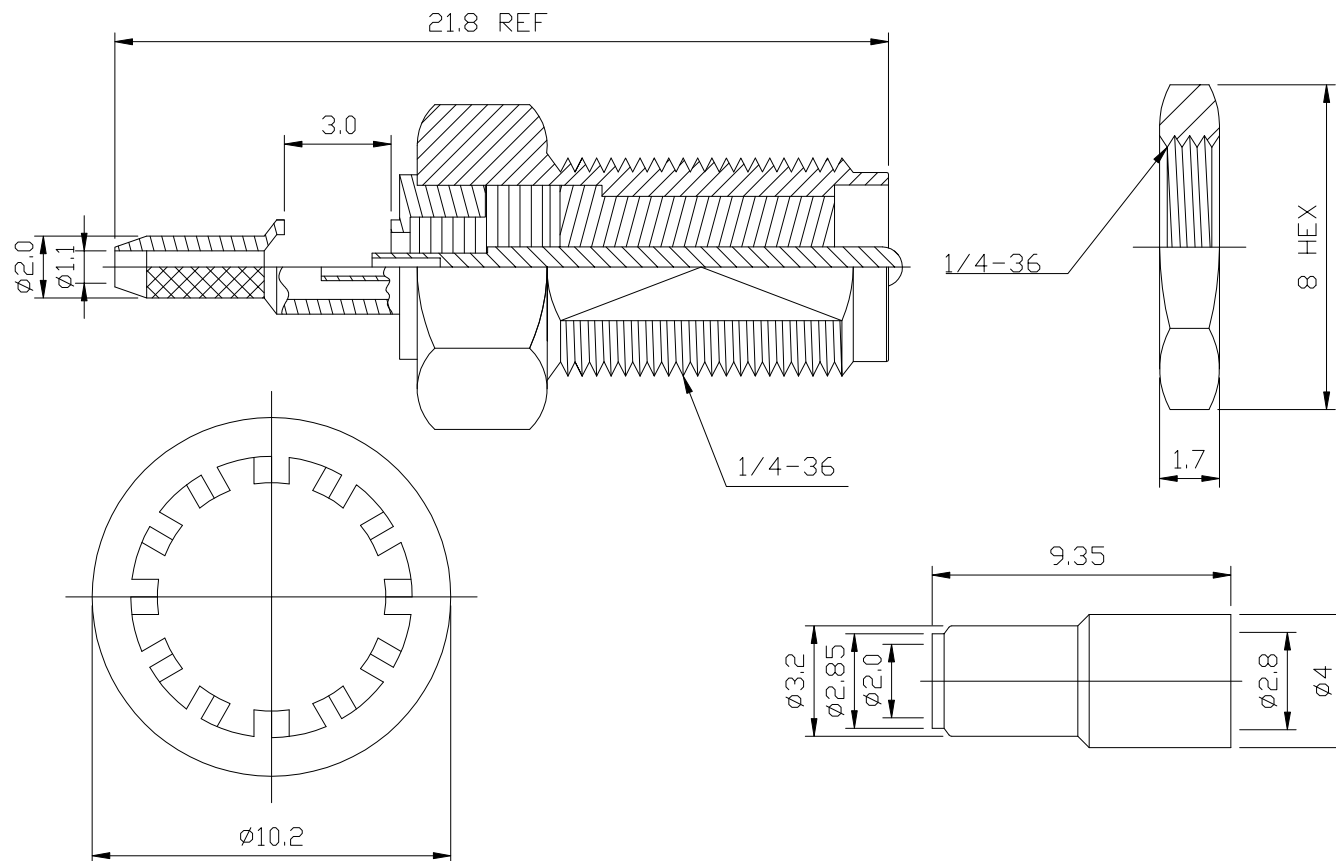

ELECTRICAL SPECIFICATIONS:
 VOLTAGE RATING: AC 500V
 WITH STANDING VOLTAGE: AC 1,000V ONE MINUTE
 INSULATION RESISTANCE: 5,000M Ω min AT DC 500V
 CONTACT RESISTANCE: 4m Ω MAX AT DC 0.1A
 FREQUENCY RANGE: 0-12GHz
 IMPEDANCE: 50 Ω

8	NUT	BRASS	GOLD	1
7	WASHER	BRASS	GOLD	1
6	BODY	BRASS	GOLD	1
5	INSULATOR	TEFLON	NONE	1
4	INSULATOR	TEFLON	NONE	1
3	CENTER PIN	BRASS	GOLD	1
2	BODY	BRASS	GOLD	1
1	FERRULE	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
 .X $\pm$
 .XX $\pm$
 .XXX $\pm$
 ANG $\pm$

照片框

ORDER INFORMATION

RPSMA-JCPBNW-178-LF

SERIES JACK CRIMP
 NUT BACK
 WASHER PANEL
 LEADFREE
 RG178

DESCRIPTION: RP SMA FEMALE CRIMP TYPE