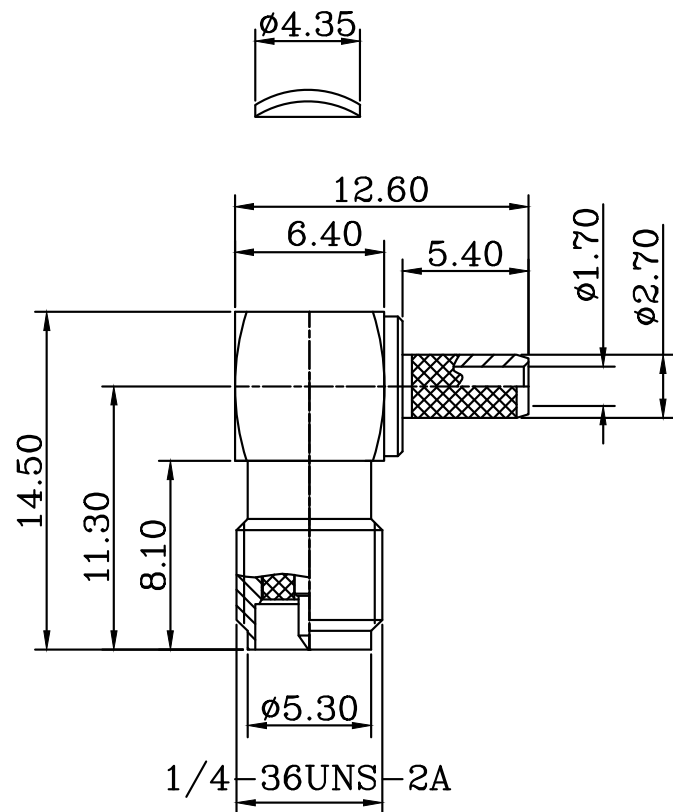


RECOMMENDED
CABLE STRIPPING DIM'S

1. CRIMPED FERRULE HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

6	FERRULE	BRASS	1	GOLD PLATED
5	COVER	BRASS	1	GOLD PLATED
4	HOUSING	BRASS	1	GOLD PLATED
3	CONTACT PIN	BRASS	1	GOLD PLATED
2	INSULATOR	TEFLON	1	NATURAL
1	BODY	BRASS	1	GOLD PLATED
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

0.5-15 = ± 0.15
15-30 = ± 0.30
30-120 = ± 0.60
>120 = ± 1.00

ANGLES
 $\pm 5^\circ$

PPOJECTION

照片框

ORDER INFORMATION

RPSMA-JCR-174-LF

SERIES

LEADFREE

RG 174

90°

CRIMP

JACK

DESCRIPTION: RP SMA JACK R/A CRIMP FOR RG174U