
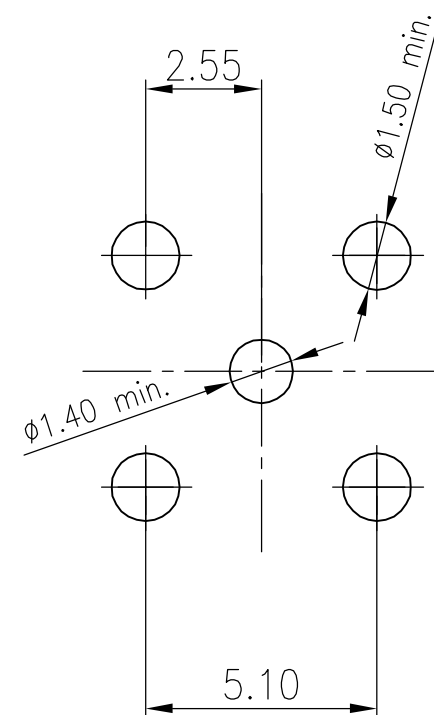
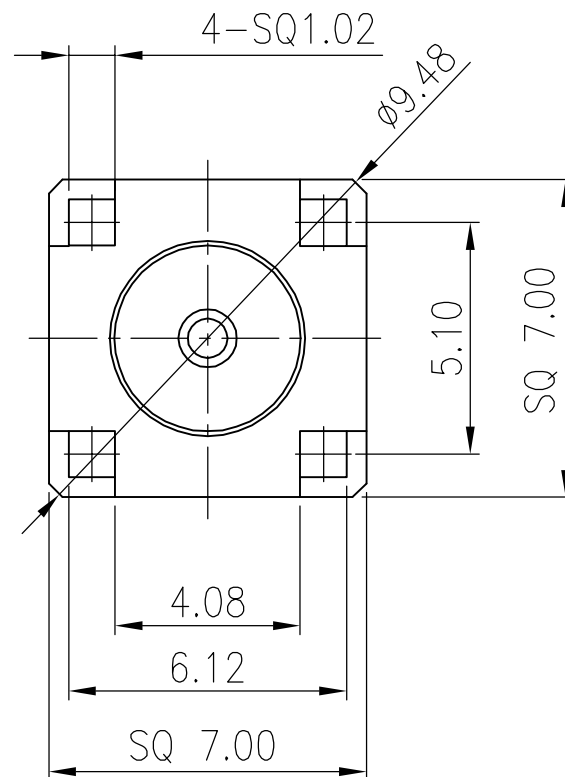


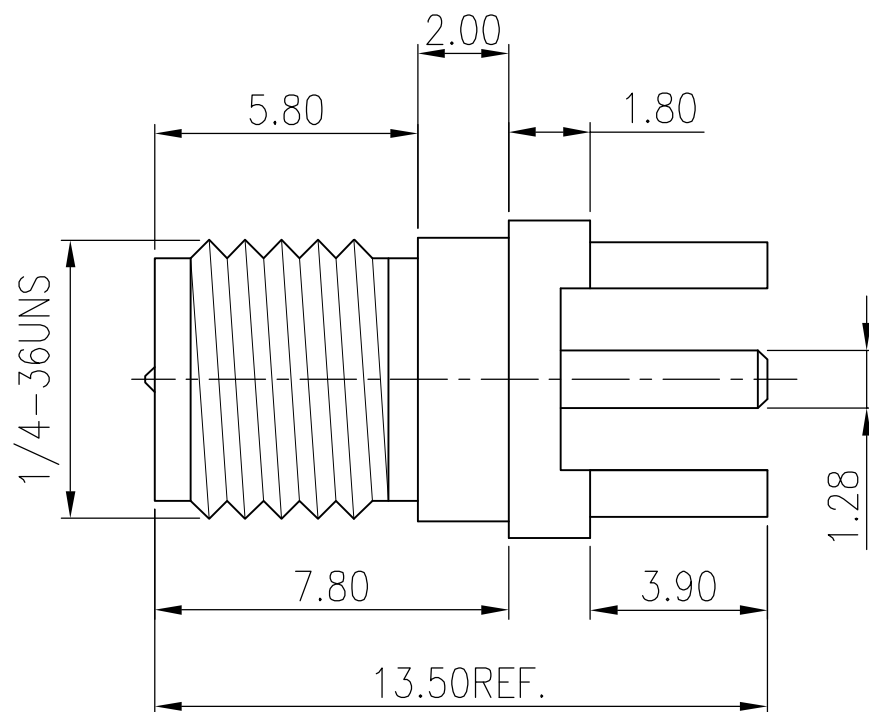

RECOMMENDED PCB LAYOUT

| ITEM | DESCRIPTION | MATERIAL | FINISH | Q'TY | PART NUMBER |
|------|-------------|----------|--------|------|-------------|
| 3    | PIN         | BRASS    | GOLD   | 1    | C-09094C    |
| 2    | INSULATOR   | PTFE     | NONE   | 1    | T-09018-6.8 |
| 1    | BODY        | BRASS    | GOLD   | 1    | B-09113C    |

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

ANGLES =  $\pm 3^\circ$   
0.5-6 =  $\pm 0.1$   
6-40 =  $\pm 0.2$   
40-120 =  $\pm 0.6$   
120-315 =  $\pm 1.0$   
ABOVE 315 =  $\pm 1.6$

PPOJECTION

照片框

ORDER INFORMATION

RPSMA-JD-50-LF

SERIES T LEADFREE  
50 OHM  
DIP 180°  
JACK

DESCRIPTION: RP SMA FEMALE PCB MOUNT, L:13.5