



- 1、All dimensions in mm [Inch]
- 2、General tolerance : $>10\pm0.4$
 $<10\pm0.25$
- 3、Electrical rating : 3A 250VAC & 3A 125VAC
- 4、Contact resistance : $<20\text{m}\Omega$ (initial)
- 5、Insulation resistance : $>1000\text{M}\Omega$ (500VDC between open contacts)
- 6、Dielectric strength : $>1500\text{V}$ 1 minute
- 7、Mechanical life : >30000 cycles
- 8、Electrical life : >10000 cycles
- 9、Temperature rise at the terminal : Max.30℃
- 10、Solder ability of terminal : Max350℃,3S(no pressure may be placed in the terminals when soldering by hand)
- 11、Any Cd Pb Hg etc and it's compounds is not include in this product






CIRCUIT SPDT

POLE FUNCTION	OPTIONS OF FUNCTION		
	A	—	B
SPDT	1-1a	—	1-1b

PANEL OUT-CUT		
Z	Y	X
0.7~1.25 [.028~.049]	9.1~9.2 [.358~.362]	13.8~13.8 [.535~.543]
1.25~2.0 [.049~.079]	9.1~9.2 [.358~.362]	13.8~14.0 [.543~.551]
2.0~3.0 [.079~.118]	9.1~9.2 [.358~.362]	14.0~14.1 [.551~.555]



* We keep the right to alter the dimension without notice.

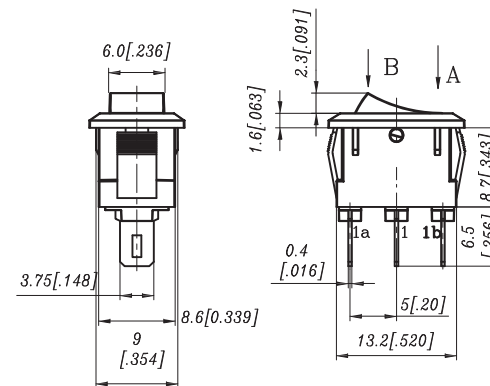

Color	Housing	Actuator
K(Black)	✓	✓
W(White)		
R(Red)		
G(Gray)		
O(Orange)		
B(Blue)		
Y(III, Yellow)		
M(III, Green)		
F(III, Blue)		
T(III, White)		

A	B	C	D	E	F	G	H	I
✓								

RoHS Compliant

TOLERANCES ARE

X. ± 0.40
X. ± 0.25
.XX $\pm$
.XXX $\pm$
ANG $\pm$

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE
SIZE A4 PROJECTION

照片框

ORDER INFORMATION

RSW14-S3PA-03-LF

SERIES LEADFREE
03 WAY
PANEL FRONT
SOLDER PIN 3.7mm

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com