


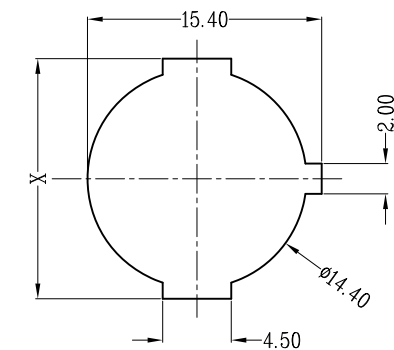
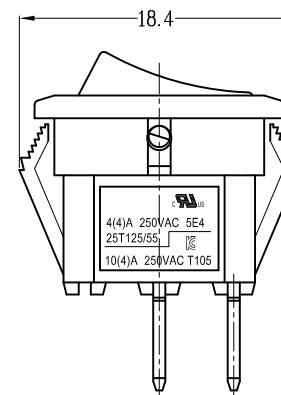


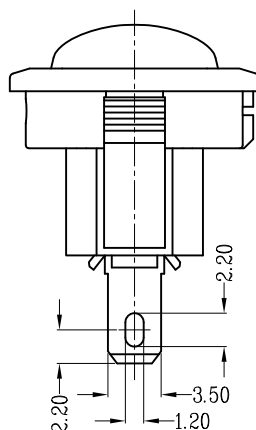



- 1、FUNCTION: ON-OFF  
 2、RATING: UL: 4(4)A 250VAC 25T125/55 5E4  
           CQC: 6/12A 250VAC T105  
           ENEC VDE: 6(4)A 250VAC T105/55  
           KC: 10(4)A 250VAC T105  
 3、OPERATION FORCE: 600±300g.f  
 4、CONTACT RESISTANCE: ≤ 50 mΩ  
 5、INSULATION RESISTANCE ≥ 100 MΩ  
 6、DIELECTRIC WITHSTAND: TERMINAL TO BUTTON 3000VAC/5mA/1MINUTE  
                                   TERMINAL TO TERMINAL 1500VAC/5mA/1MINUTE

SUGGESTED PANEL HOLE SIZE

| thk       | X      |
|-----------|--------|
| 0.5~1.2mm | 15.4mm |
| 1.3~2.0mm | 15.8mm |
| 2.1~3.5mm | 16.2mm |

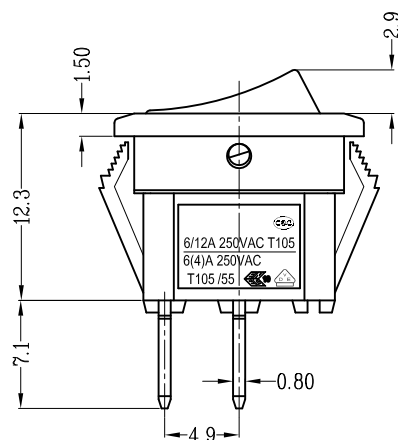

WIRING DIAGRAM

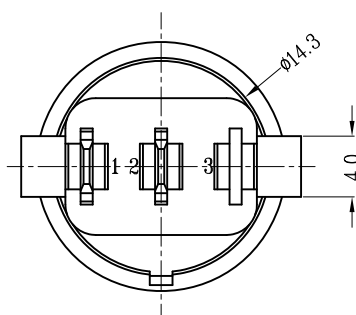

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
 .X ± 0.30  
 .XX ± 0.15  
 .XXX ±  
 ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

RSW16-S3PA-0302-LF

SERIES

LEADFREE

3P2C

PANEL FRONT

SOLDER PIN 3.5mm

DESCRIPTION: