


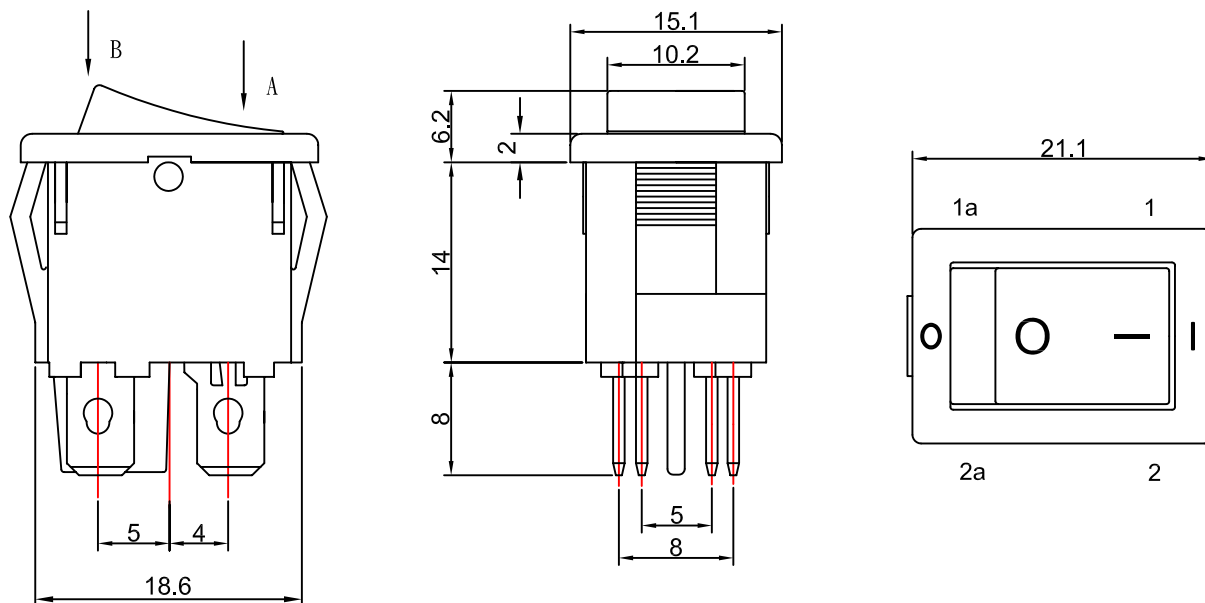

SPECIFICATION

RATING: 6A 250V AC, 9A 125V AC.

CONTACT RESISTANCE: <20mΩ DC2~4V 0.1A.

INSULATION RESISTANCE: >500MΩ DC 500V.

DIELECTRIC STRENGTHS: 1500V AC 1 minute.

MECHANICAL LIFE: OVER 30,000 Cycles.


ELECTRICAL LIFE: OVER 10,000 Cycles.

SOLDERING TEMPERATURE: 230°C Max for 3 Sec.

TOLERANCE: .XX=±0.2mm, .X=±0.3mm.

POLE FUNCTION	OPTIONS OF FUNCTION		
	A		B
DPST	1-1a 1-1b		OFF

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	12.8~12.9	19.2~19.3
1.25~2.00	12.8~12.9	19.3~19.4
2.00~3.00	12.8~12.9	19.5~19.6



HOUSING COLOR	
K	Black
W	White
H	Gray

LAMP COLOR	
R	Red
Y	Yellow
G	Green

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X, ±
.XX, ±
.XXX, ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

RSWL-Q4PAxy-0404-LF
SERIES T T T T LEADFREE
4.8mm TAB 4P4C
PANEL LAMP COLOR
HOUSING COLOR R:RED
K:BLACK Y:YELLOW
W:WHITE G:GREEN
H:GRAY

DESCRIPTION: **ROCKER SWITCH**